


## Luminaire

Code AF81005+AF95201  
 Name SHARP SMD.12X 33W 930 FL ND SIL+ SCREEN 4X WHITE

## Measurem.

Code FTS1800797  
 Name SHARP SMD.12X 33W 930 FL ND SIL+ SCREEN 4X WHITE

Luminaire Flux	2411.54 lm	Luminaire Power	37.00 W	Efficacy	65.18 lm/W	Efficiency	100.00%
Lamps Flux	2411.54 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	464 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2411.54 lm	
LED Flux=3183.96lm LED Power=33W Eff=76% EfcLed=96lm/W EfcLum=65lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

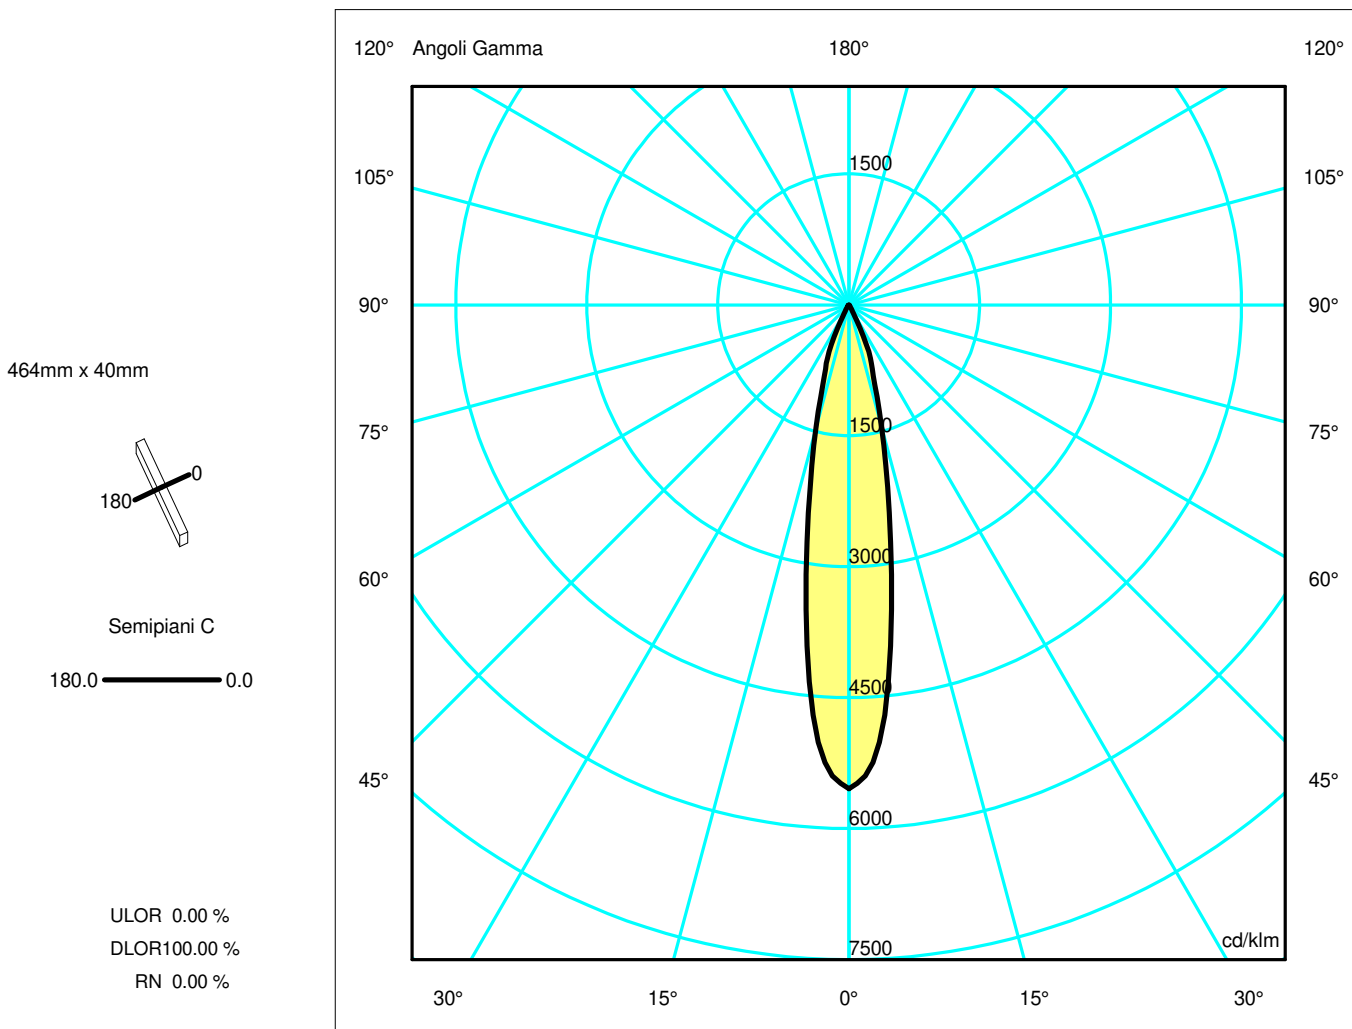

## Luminaire

Code AF81005+AF95201  
Name SHARP SMD.12X 33W 930 FL ND SIL+ SCREEN 4X WHITE

## Measurement


Code FTS1800797  
Name SHARP SMD.12X 33W 930 FL ND SIL+ SCREEN 4X WHITE

Luminaire Flux	2411.54 lm	Luminaire Power	37.00 W	Efficacy	65.18 lm/W	Efficiency	100.00%
Lamps Flux	2411.54 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	464 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2411.54 lm	
LED Flux=3183.96lm LED Power=33W Eff=76% EfcLed=96lm/W EfcLum=65lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	13363.68	11372.54	3508.56	959.31	60.19	16.98	5.90	3.78	2.68	1.26
OB	13363.68	11372.54	3508.56	959.31	60.19	16.98	5.90	3.78	2.68	1.26
OC	13363.68	11372.54	3508.56	959.31	60.19	16.98	5.90	3.78	2.68	1.26
OD	13363.68	11372.54	3508.56	959.31	60.19	16.98	5.90	3.78	2.68	1.26

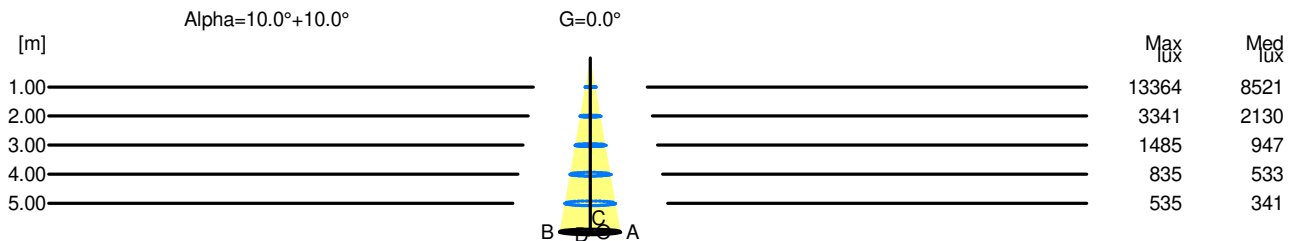

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	13364	8521		
2.00	0.70	3341	2130		
3.00	1.05	1485	947		
4.00	1.41	835	533		
5.00	1.76	535	341		