


Luminaire

Code AF82301+AF95201
 Name SHARP SMD.12X 33W 940 FL DIM BCO+ SCREEN 4X WHITE

Measurem.

Code FTS1800822
 Name SHARP SMD.12X 33W 940 FL DIM BCO+ SCREEN 4X WHITE

Luminaire Flux	2581.30 lm	Luminaire Power	37.00 W	Efficacy	69.76 lm/W	Efficiency	100.00%
Lamps Flux	2581.30 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	464 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2581.30 lm	
LED Flux=3407.94lm LED Power=33W Eff=76% EfcLed=103lm/W EfcLum=70lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

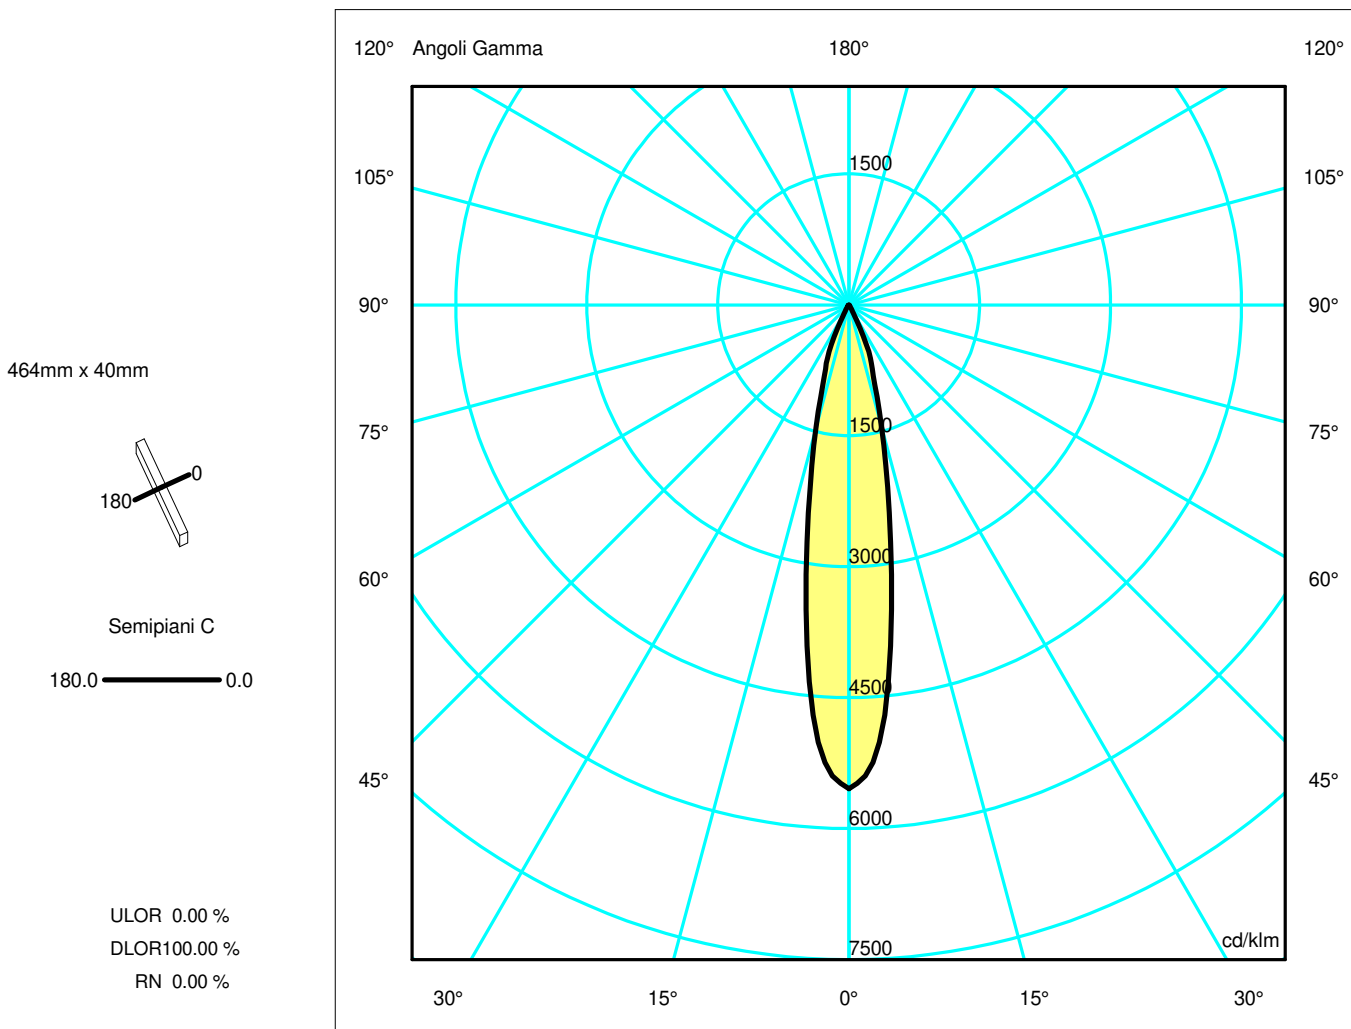

Luminaire

Code AF82301+AF95201
Name SHARP SMD.12X 33W 940 FL DIM BCO+ SCREEN 4X WHITE

Measurement


Code FTS1800822
Name SHARP SMD.12X 33W 940 FL DIM BCO+ SCREEN 4X WHITE

Luminaire Flux	2581.30 lm	Luminaire Power	37.00 W	Efficacy	69.76 lm/W	Efficiency	100.00%
Lamps Flux	2581.30 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	464 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2581.30 lm	
LED Flux=3407.94lm LED Power=33W Eff=76% EfcLed=103lm/W EfcLum=70lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	14304.41	12173.11	3755.55	1026.84	64.43	18.18	6.32	4.05	2.87	1.35
OB	14304.41	12173.11	3755.55	1026.84	64.43	18.18	6.32	4.05	2.87	1.35
OC	14304.41	12173.11	3755.55	1026.84	64.43	18.18	6.32	4.05	2.87	1.35
OD	14304.41	12173.11	3755.55	1026.84	64.43	18.18	6.32	4.05	2.87	1.35

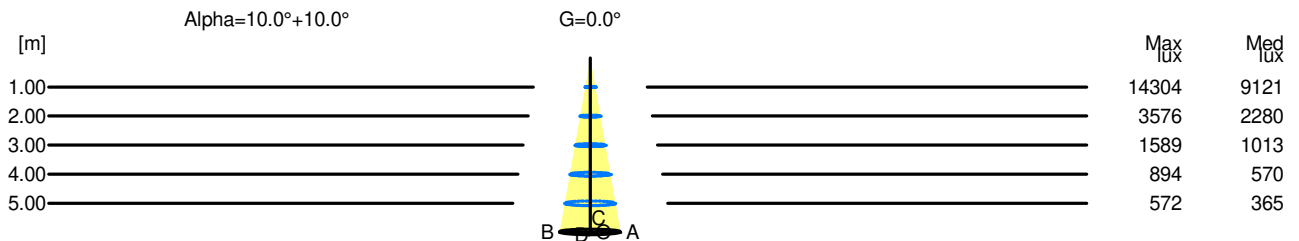

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	14304	9121		
2.00	0.70	3576	2280		
3.00	1.05	1589	1013		
4.00	1.41	894	570		
5.00	1.76	572	365		