

Luminaire

Code AN00118+AP90200
 Name VECTOR 40 TRACK 930 SP ND BR.COPPER + LENS FOR ELLIPTICAL EMISSION

Measurement


Code FTS1800557
 Name VECTOR 40 TRACK 930 SP ND BR.COPPER + LENS FOR ELLIPTICAL EMISSION

| | | | | | | | |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 359 lm | Luminaire Power | 10.0 W | Efficacy | 35.938 lm/W | Efficiency | 100.00% |
| Source Flux | 359 lm | Maximum value | 4963.04 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.000573 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.000139 m2 |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 10-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 359 lm | |

LED Flux=667,5lm LED Power=8W Eff=54% EfcLed=83lm/W EfcLum=36lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 96 99 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN
 A60
 BZ 1

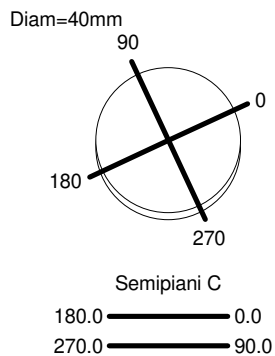

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

