


## Luminaire

Code AP15215+AP91200  
 Name VECTOR 55 MAGNET 940 FL DALI BR.SILVER + LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS1800335-A  
 Name VECTOR 55 MAGNET 940 FL DALI BR.SILVER + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	1197 lm	Luminaire Power	23.0 W	Efficacy	52.049 lm/W	Efficiency	100.00%
Source Flux	1197 lm	Maximum value	3297.87 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	51 mm	Height	0 mm		
Horizontal Luminous Area		0.002043 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000494 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-04-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1197 lm	
LED Flux=2383lm LED Power=21W Eff=50% EfcLed=113lm/W EfcLum=52lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	94 98 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

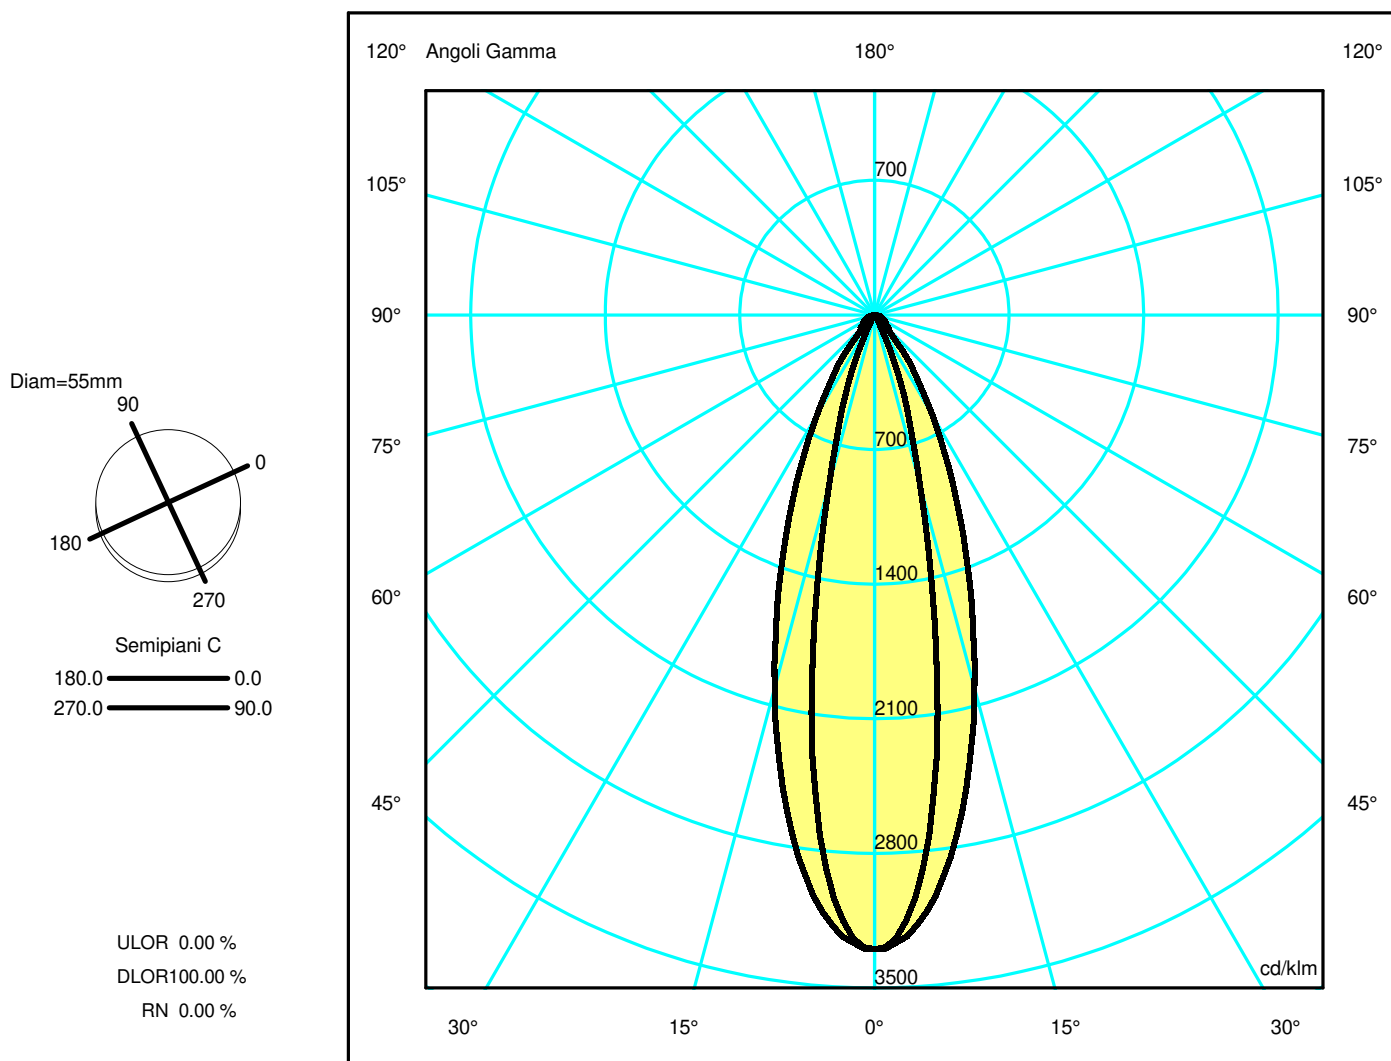

## Luminaire

Code AP15215+AP91200  
Name VECTOR 55 MAGNET 940 FL DALI BR.SILVER + LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS1800335-A  
Name VECTOR 55 MAGNET 940 FL DALI BR.SILVER + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	1197 lm	Luminaire Power	23.0 W	Efficacy	52.049 lm/W	Efficiency	100.00%
Source Flux	1197 lm	Maximum value	3297.87 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	51 mm	Height	0 mm		
Horizontal Luminous Area		0.002043 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000494 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-04-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1197 lm	


LED Flux=2383lm LED Power=21W Eff=50% EfcLed=113lm/W EfcLum=52lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	94 98 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.19	0.39	0.58	0.78	0.97	OC	0.32	0.65	0.97	1.30	1.62
OB	0.19	0.39	0.58	0.78	0.97	OD	0.32	0.65	0.97	1.30	1.62

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	3947.94	3460.03	1095.63	174.79	30.04	13.09	8.13	5.72	4.25	1.24
OB	3947.94	3460.03	1095.63	174.79	30.04	13.09	8.13	5.72	4.25	1.24
OC	3947.94	3728.35	2401.45	1149.14	419.16	115.61	88.14	57.96	37.59	8.70
OD	3947.94	3728.35	2401.45	1149.14	419.16	115.61	88.14	57.96	37.59	8.70

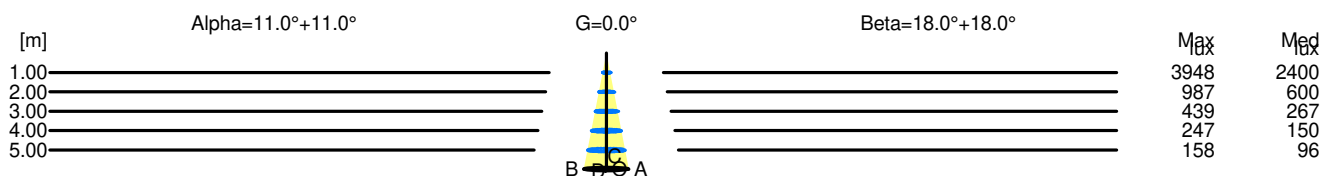

H[m]	D[m]	Max lux	Med lux	Alpha=11.0°+11.0°	G=0.0
1.00	0.39	3948	2400		
2.00	0.78	987	600		
3.00	1.17	439	267		
4.00	1.56	247	150		
5.00	1.94	158	96		

H[m]	D[m]	Max lux	Med lux	Beta=18.0°+18.0°	G=0.0
1.00	0.65	3948	2400		
2.00	1.30	987	600		
3.00	1.95	439	267		
4.00	2.60	247	150		
5.00	3.25	158	96		