

## Luminaire

Code BB01100+DV1016 + M239700

Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 50W DIM + schermo opalino

## Measurem.

Code FTS1801274

Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 50W DIM + schermo opalino

Luminaire Flux	4257.87 lm	Luminaire Power	54.00 W	Efficacy	78.85 lm/W	Efficiency	100.00%
Sources Flux	4257.87 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4257.87 lm	


LED Flux=5812lm LED Power=50W Eff=73% EfcLed=116lm/W EfcLum=79lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h

C.I.E. 53 82 97 100 100  
F UTE 1.00 D

D DIN 5040  
B NBN

A40  
BZ 4

Diam=250mm




Semipiani C

180.0 ——— 0.0

ULOR 0.02 %

DLOR 99.98 %

RN 0.02 %

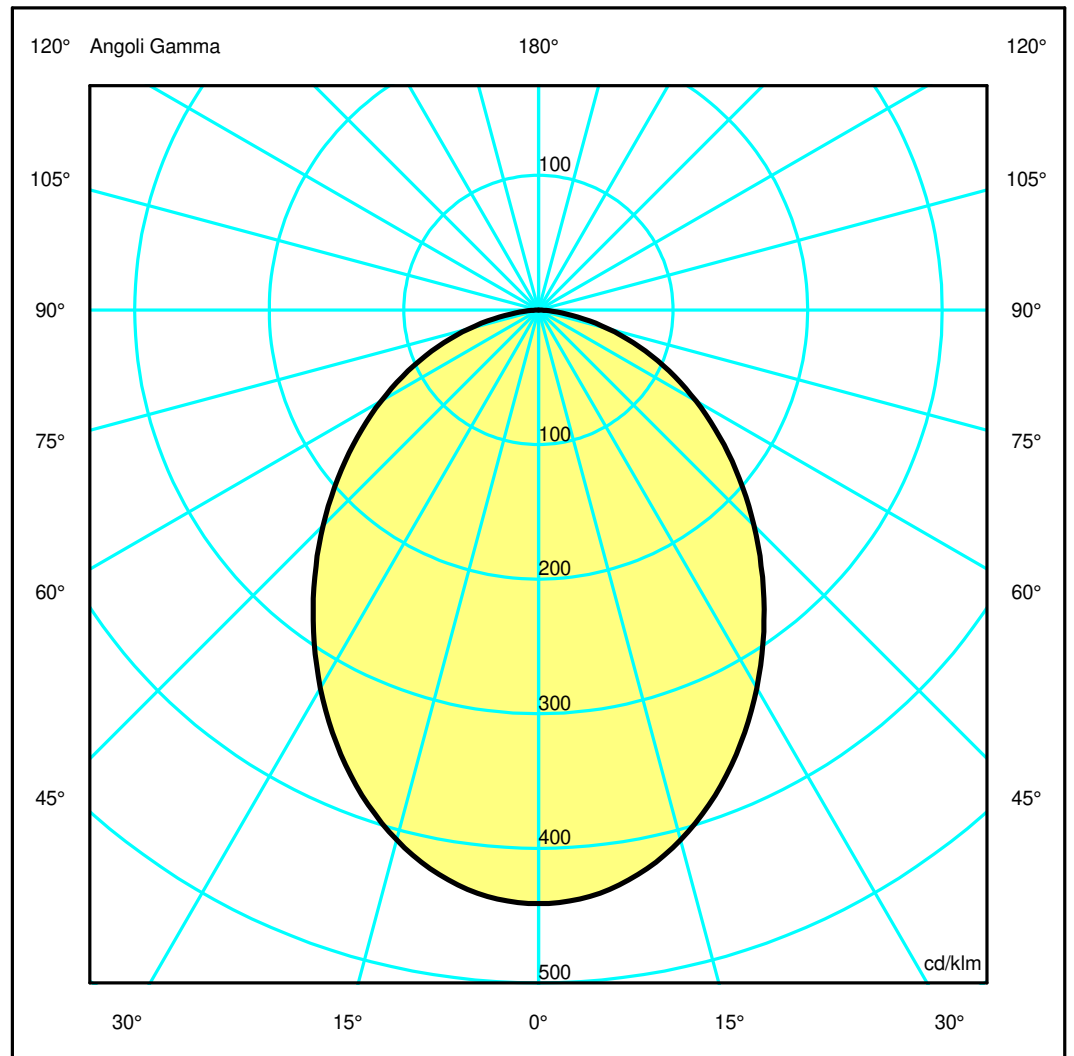

## Luminaire

Code BB01100+DV1016 + M239700

Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 50W DIM + schermo opalino

## Measurement

Code FTS1801274


Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 50W DIM + schermo opalino

Luminaire Flux	4257.87 lm	Luminaire Power	54.00 W	Efficacy	78.85 lm/W	Efficiency	100.00%
Sources Flux	4257.87 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4257.87 lm	
LED Flux=5812lm LED Power=50W Eff=73% EfcLed=116lm/W EfcLum=79lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	53 82 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.03	2.06	3.10	4.13	5.16	OC	1.03	2.06	3.10	4.13	5.16
OB	1.03	2.06	3.10	4.13	5.16	OD	1.03	2.06	3.10	4.13	5.16

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1877.63	1861.61	1735.41	1512.62	1241.98	963.83	699.79	455.49	228.89	45.03
OB	1877.63	1861.61	1735.41	1512.62	1241.98	963.83	699.79	455.49	228.89	45.03
OC	1877.63	1861.61	1735.41	1512.62	1241.98	963.83	699.79	455.49	228.89	45.03
OD	1877.63	1861.61	1735.41	1512.62	1241.98	963.83	699.79	455.49	228.89	45.03

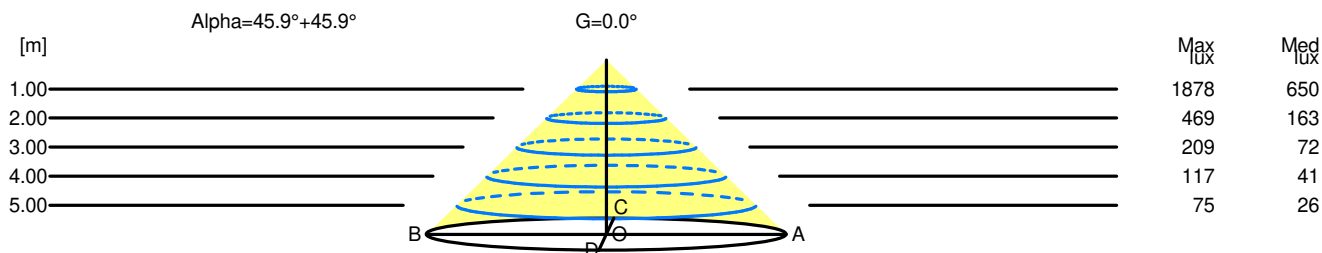

H[m]	D[m]	Max lux	Med lux	Alpha=45.9°+45.9°	G=0.0
1.00	2.06	1878	650		
2.00	4.13	469	163		
3.00	6.19	209	72		
4.00	8.26	117	41		
5.00	10.32	75	26		