


Luminaire

Code BB12001+DV1017 + M239600
 Name LUCERI Q TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo prismoptico


Measurement

Code FTS1801373
 Name LUCERI Q TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo prismoptico

Luminaire Flux	2139.04 lm	Luminaire Power	27.00 W	Efficacy	79.22 lm/W	Efficiency	100.00%
Sources Flux	2139.04 lm	Maximum value	974.90 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2139.04 lm	
LED Flux=3130lm LED Power=25W Eff=68% EfcLed=125lm/W EfcLum=79lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	81 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

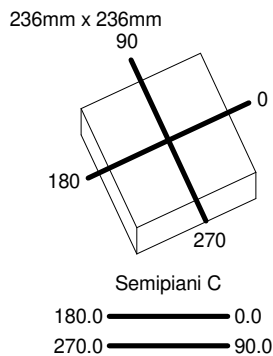

ULOR 0.01 %
 DLOR 99.99 %
 RN 0.01 %

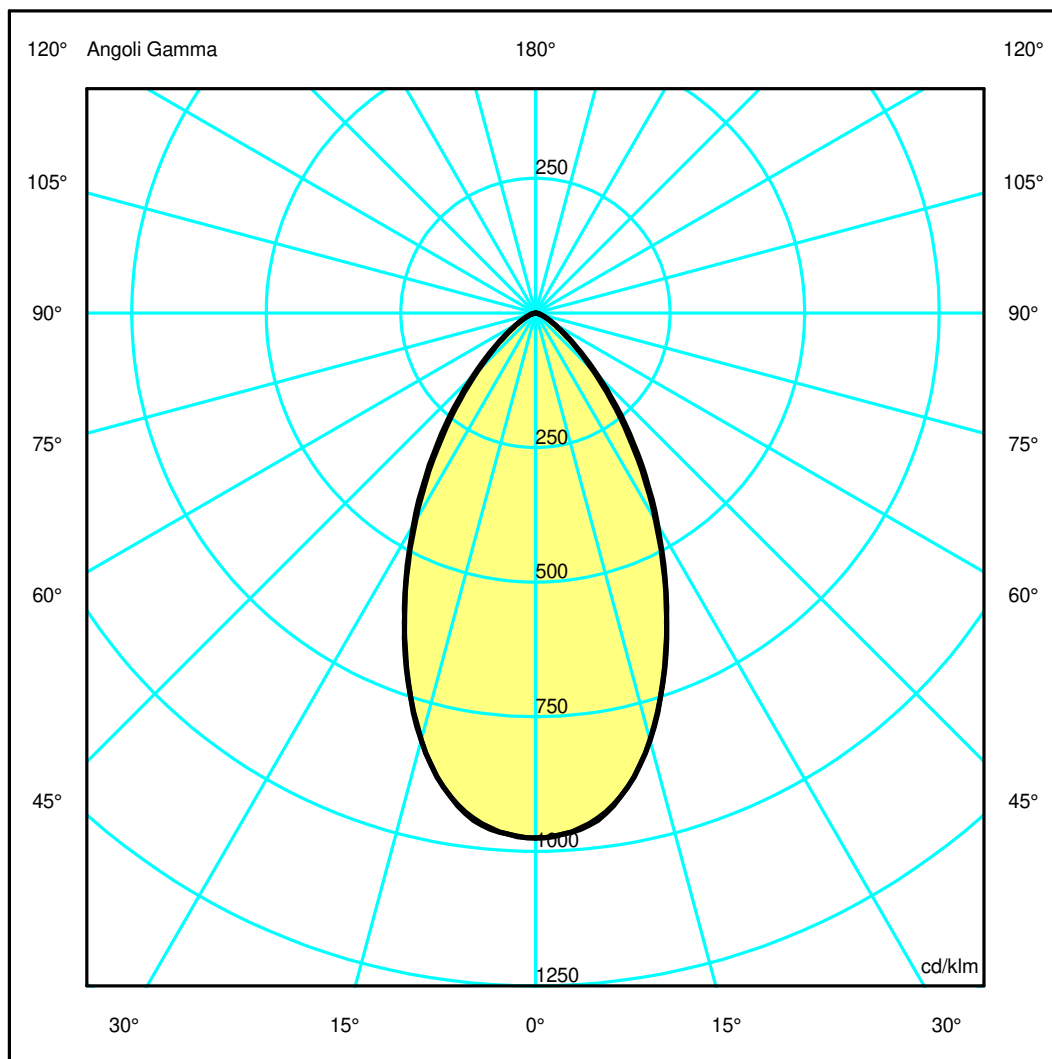

Luminaire

Code BB12001+DV1017 + M239600
 Name LUCERI Q TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo prismoptic

Measurerm.

Code FTS1801373
 Name LUCERI Q TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo prismoptic

Luminaire Flux	2139.04 lm	Luminaire Power	27.00 W	Efficacy	79.22 lm/W	Efficiency	100.00%
Sources Flux	2139.04 lm	Maximum value	974.90 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2139.04 lm	


LED Flux=3130lm LED Power=25W Eff=68% EfcLed=125lm/W EfcLum=79lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h

C.I.E.	81 97 99 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.54	1.08	1.62	2.16	2.70	OC	0.54	1.09	1.63	2.18	2.72
OB	0.54	1.08	1.62	2.16	2.70	OD	0.54	1.09	1.63	2.18	2.72

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2085.36	2053.24	1755.87	1224.30	710.06	325.15	125.98	47.86	17.20	4.54
OB	2085.36	2053.24	1755.87	1224.30	710.06	325.15	125.98	47.86	17.20	4.54
OC	2085.36	2058.80	1757.08	1227.89	735.64	347.58	134.66	51.22	18.34	4.48
OD	2085.36	2058.80	1757.08	1227.89	735.64	347.58	134.66	51.22	18.34	4.48

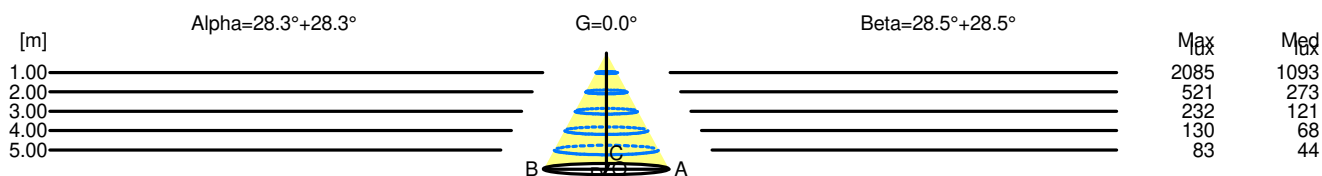

H[m]	D[m]	Max lux	Med lux	Alpha=28.3°+28.3°	G=0.0
1.00	1.08	2085	1093		
2.00	2.16	521	273		
3.00	3.24	232	121		
4.00	4.31	130	68		
5.00	5.39	83	44		

H[m]	D[m]	Max lux	Med lux	Beta=28.5°+28.5°	G=0.0
1.00	1.09	2085	1093		
2.00	2.18	521	273		
3.00	3.26	232	121		
4.00	4.35	130	68		
5.00	5.44	83	44		