


Luminaire

Code BB12005+DV1015
Name LUCERI Q TRIM max46W 930 MIRROR SILV. + Driver 50W ND

Measurement

Code FTS1801149
Name LUCERI Q TRIM max46W 930 MIRROR SILV. + Driver 50W ND

Luminaire Flux	4388.60 lm	Luminaire Power	54.00 W	Efficacy	81.27 lm/W	Efficiency	100.00%
Sources Flux	4388.60 lm	Maximum value	1117.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	177 mm	Width	177 mm	Height	0 mm
Horizontal Luminous Area		0.031329 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007579 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4388.60 lm	
LED Flux=5451lm LED Power=50W Eff=81% EfcLed=109lm/W EfcLum=81lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

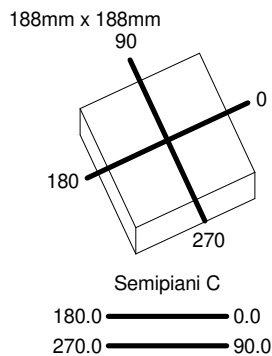

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

