


Luminaire

Code BW42104+AP91400
 Name VECTOR SPOT 55 CHANNEL 14W 4000K FL BLK + ANTI DAZZLE LOUVRE

Measurement

Code FTS2300113
 Name VECTOR SPOT 55 CHANNEL 14W 4000K FL BLK + ANTI DAZZLE LOUVRE

Luminaire Flux	864 lm	Luminaire Power	14.0 W	Efficacy	61.683 lm/W	Efficiency	100.00%
Source Flux	864 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000402 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		864 lm	
LED Flux=1685lm LED Power=14W Eff=51% EfcLed=120lm/W EfcLum=62lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

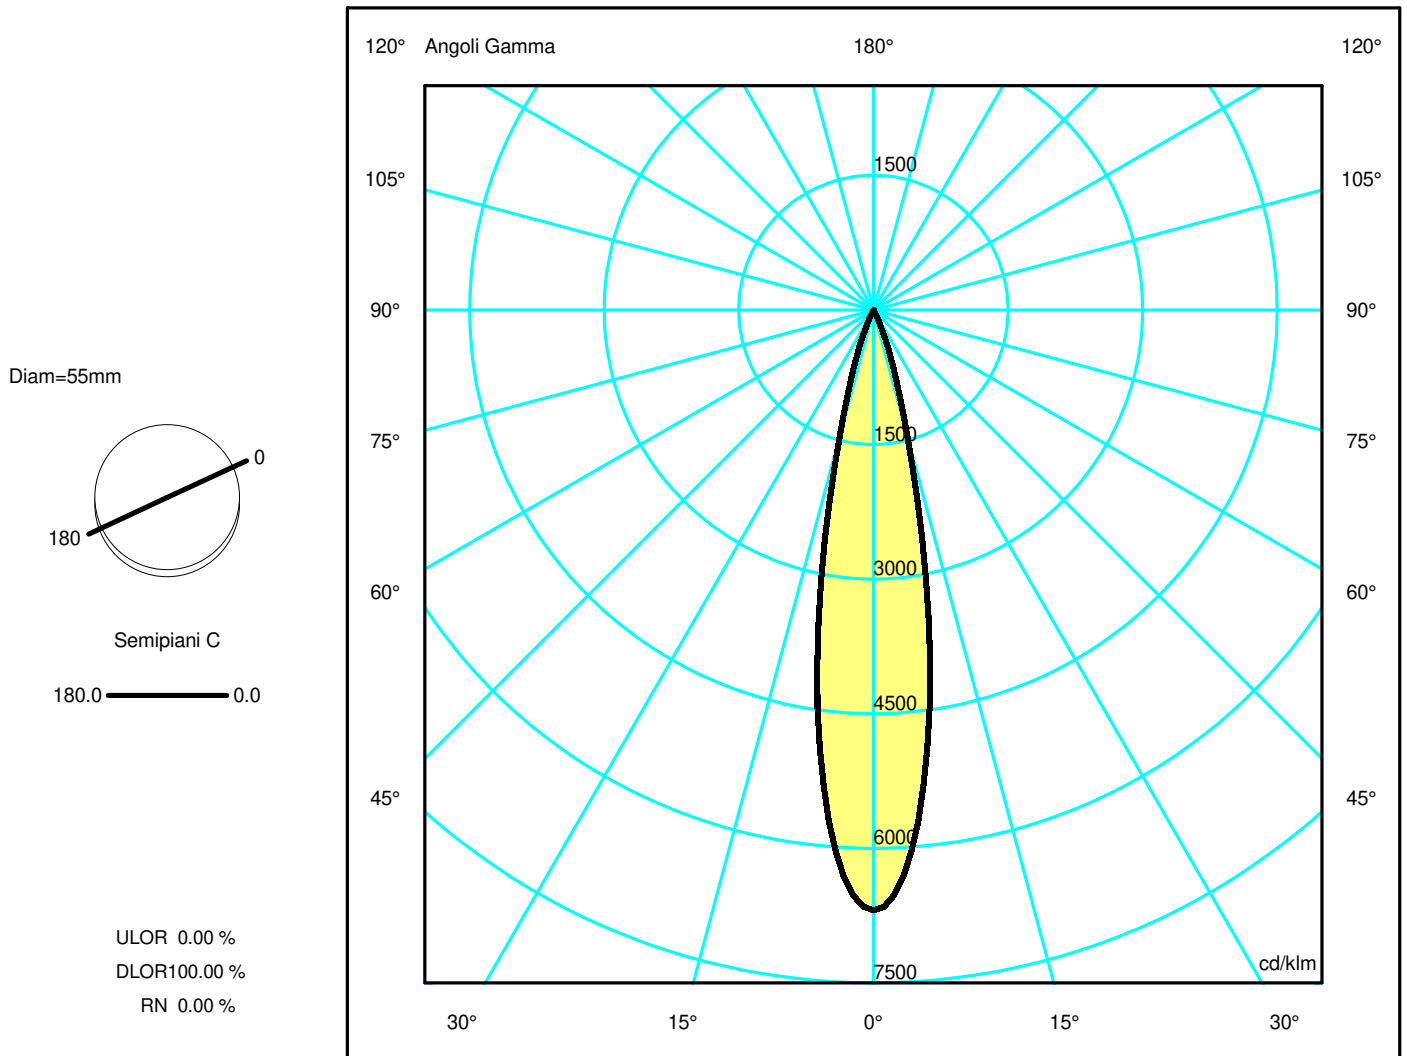

Luminaire

Code BW42104+AP91400
Name VECTOR SPOT 55 CHANNEL 14W 4000K FL BLK + ANTI DAZZLE LOUVRE

Measur.

Code FTS2300113
Name VECTOR SPOT 55 CHANNEL 14W 4000K FL BLK + ANTI DAZZLE LOUVRE

Luminaire Flux	864 lm	Luminaire Power	14.0 W	Efficacy	61.683 lm/W	Efficiency	100.00%
Source Flux	864 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	109 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		24-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		864 lm	


LED Flux=1685lm LED Power=14W Eff=51% EfcLed=120lm/W EfcLum=62lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.37	0.55	0.74	0.92	OC	0.18	0.37	0.55	0.74	0.92
OB	0.18	0.37	0.55	0.74	0.92	OD	0.18	0.37	0.55	0.74	0.92

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5775.60	4934.17	1264.47	115.91	11.21	3.08	1.08	0.34	0.26	0.19
OB	5775.60	4934.17	1264.47	115.91	11.21	3.08	1.08	0.34	0.26	0.19
OC	5775.60	4934.17	1264.47	115.91	11.21	3.08	1.08	0.34	0.26	0.19
OD	5775.60	4934.17	1264.47	115.91	11.21	3.08	1.08	0.34	0.26	0.19

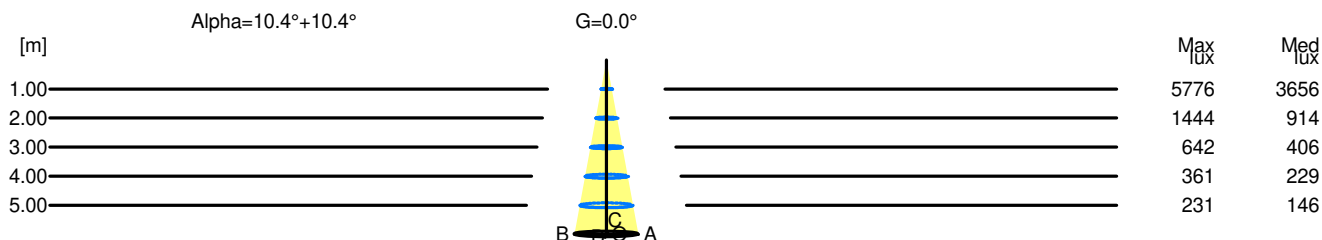

H[m]	D[m]	Max lux	Med lux	Alpha=10.4°+10.4°	G=0.0
1.00	0.37	5776	3656		
2.00	0.74	1444	914		
3.00	1.10	642	406		
4.00	1.47	361	229		
5.00	1.84	231	146		