

Luminaire

Code CA21201
Name GOPLE 60 S / TRK16 48V 3000K WF BCO

Measurum.

Code FTS2200097
Name GOPLE 60 S / TRK16 48V 3000K WF BCO

Luminaire Flux	542 lm	Luminaire Power	9.0 W	Efficacy	60.180 lm/W	Efficiency	100.00%
Source Flux	542 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		542 lm	
LED Flux=867lm LED Power=7.9W Eff=62% EfcLed=110lm/W EfcLum=60lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

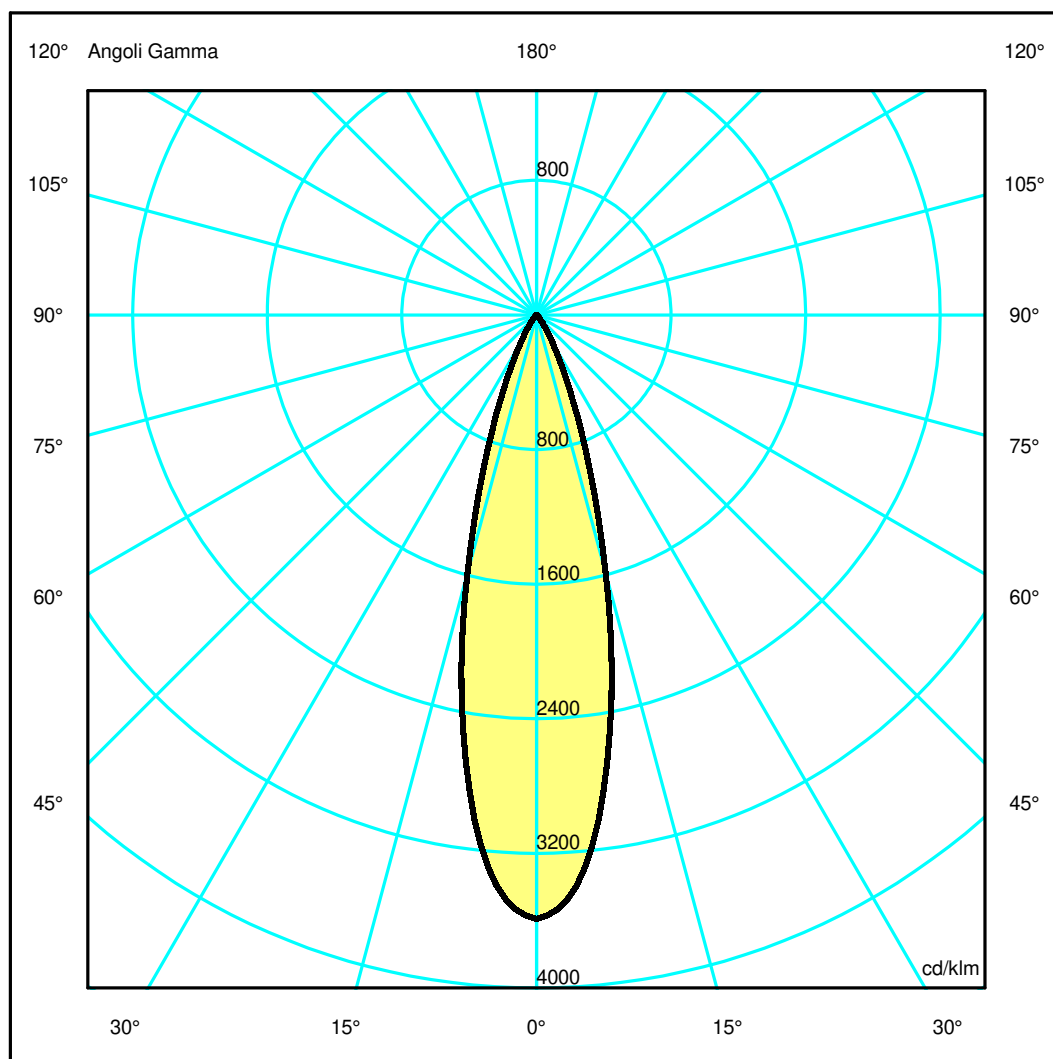

Luminaire

Code CA21201
Name GOPLE 60 S / TRK16 48V 3000K WF BCO

Measurerm.

Code FTS2200097
Name GOPLE 60 S / TRK16 48V 3000K WF BCO

Luminaire Flux	542 lm	Luminaire Power	9.0 W	Efficacy	60.180 lm/W	Efficiency	100.00%
Source Flux	542 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		542 lm	


LED Flux=867lm LED Power=7.9W Eff=62% EfcLed=110lm/W EfcLum=60lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1944.55	1785.16	861.60	223.93	45.81	10.14	2.59	0.45	0.00	0.00
OB	1944.55	1785.16	861.60	223.93	45.81	10.14	2.59	0.45	0.00	0.00
OC	1944.55	1785.16	861.60	223.93	45.81	10.14	2.59	0.45	0.00	0.00
OD	1944.55	1785.16	861.60	223.93	45.81	10.14	2.59	0.45	0.00	0.00

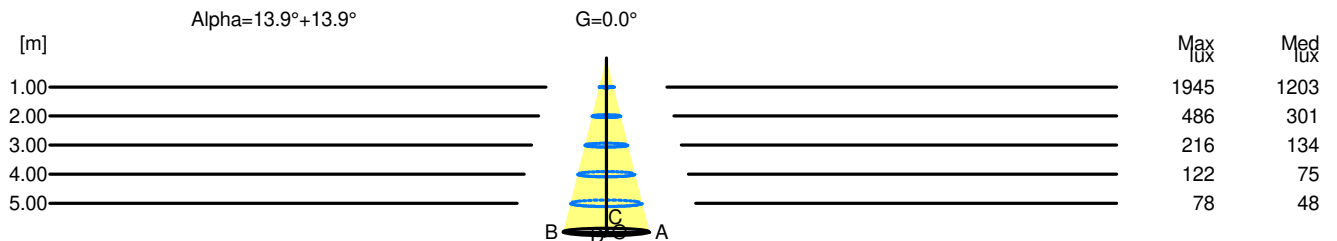

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	1945	1203		
2.00	0.99	486	301		
3.00	1.48	216	134		
4.00	1.98	122	75		
5.00	2.47	78	48		