


Luminaire

Code KZ53204+AP90300
 Name kata metron pst spt 2x40 Dali 940 WF nro + Soft Filter

Measurement

Code FTS2400459.
 Name kata metron pst spt 2x40 Dali 940 WF nro + Soft Filter

Luminaire Flux	430 lm	Luminaire Power	9.5 W	Efficacy	45.263 lm/W	Efficiency	100.00%
Source Flux	430 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000855 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000207 m2				
Coordinate system Date Measurement Distance	CG 21-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 430 lm				
LED Flux=929lm LED Power=8W Eff=46% EfcLed=118lm/W EfcLum=45lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	96 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				

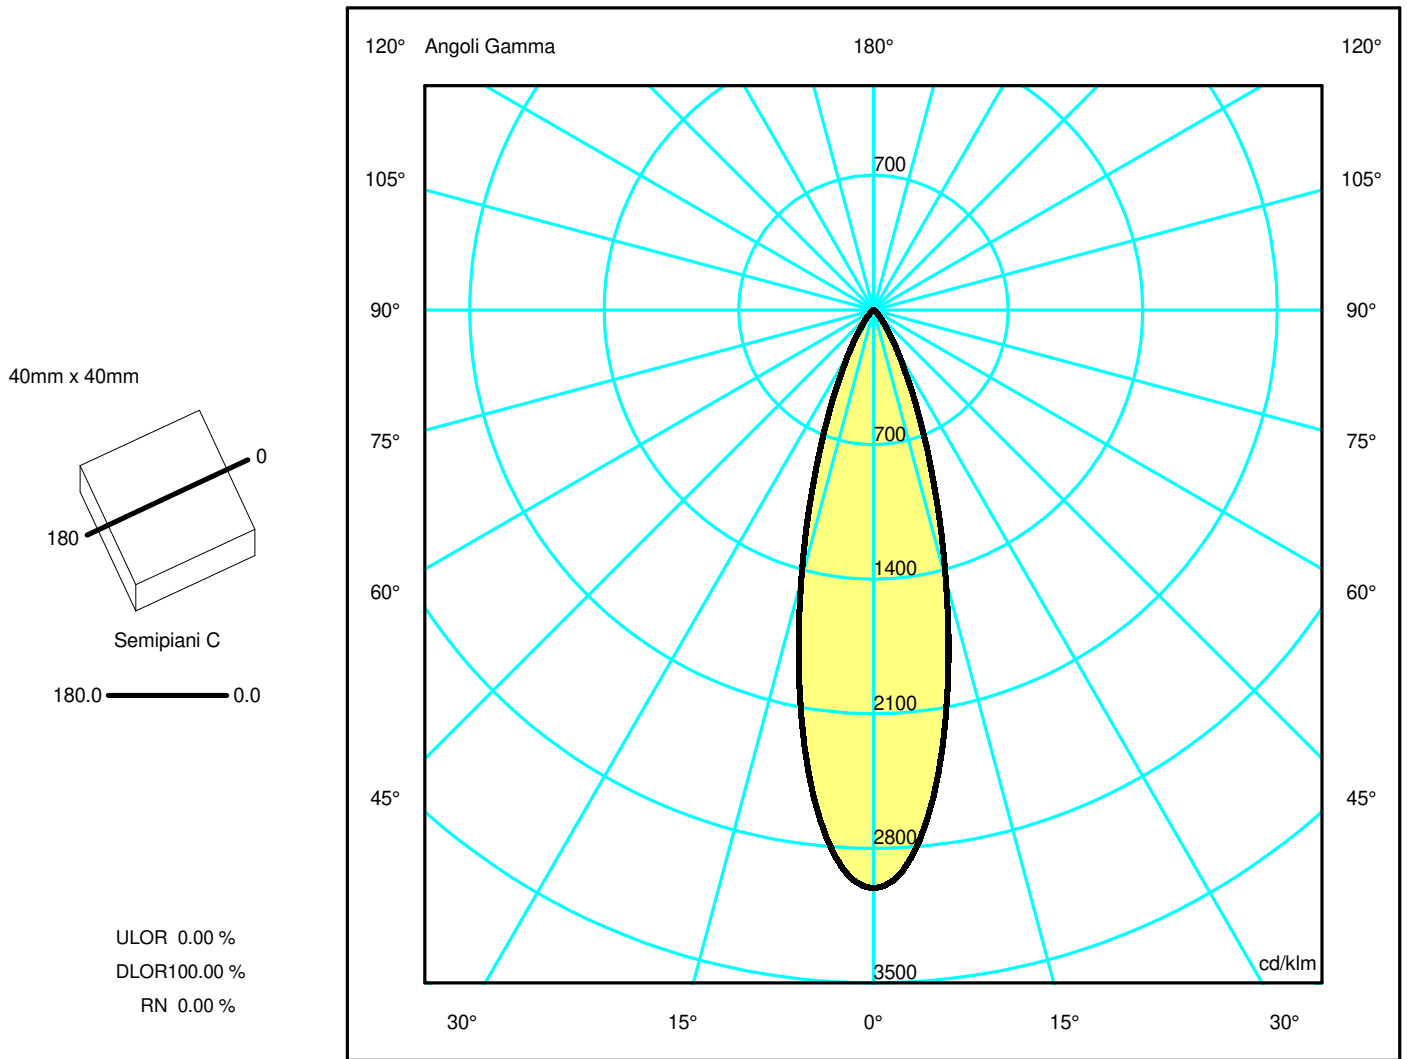

Luminaire

Code KZ53204+AP90300
Name kata metron pst spt 2x40 Dali 940 WF nro + Soft Filter

Measur.


Code FTS2400459.
Name kata metron pst spt 2x40 Dali 940 WF nro + Soft Filter

Luminaire Flux	430 lm	Luminaire Power	9.5 W	Efficacy	45.263 lm/W	Efficiency	100.00%
Source Flux	430 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000855 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000207 m2				
Coordinate system Date Measurement Distance	CG 21-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 430 lm				
LED Flux=929lm LED Power=8W Eff=46% EfcLed=118lm/W EfcLum=45lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	96 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.31	OC	0.26	0.52	0.78	1.04	1.31
OB	0.26	0.52	0.78	1.04	1.31	OD	0.26	0.52	0.78	1.04	1.31

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1293.45	1188.64	625.26	206.35	56.04	15.01	4.45	1.90	0.83	0.09
OB	1293.45	1188.64	625.26	206.35	56.04	15.01	4.45	1.90	0.83	0.09
OC	1293.45	1188.64	625.26	206.35	56.04	15.01	4.45	1.90	0.83	0.09
OD	1293.45	1188.64	625.26	206.35	56.04	15.01	4.45	1.90	0.83	0.09

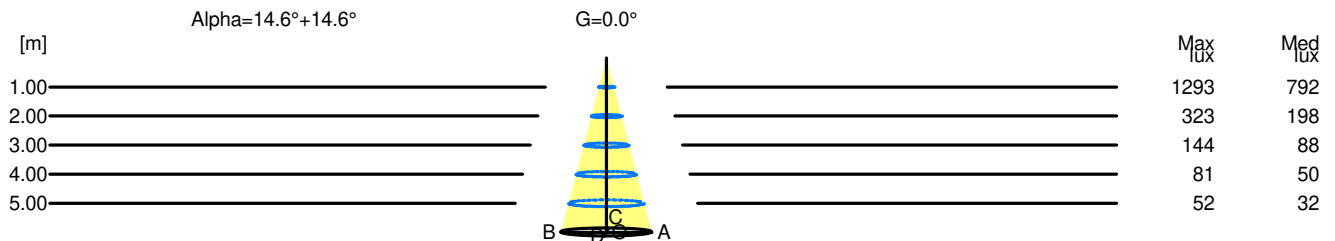

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	1293	792		
2.00	1.04	323	198		
3.00	1.57	144	88		
4.00	2.09	81	50		
5.00	2.61	52	32		