

Luminaire

Code NL1732025K0
 Name LineaLed Wallwasher 30 - FLOOD - 3000K

Measurerm.

Code FTS1601646-A
 Name LineaLed Wallwasher 30 - FLOOD - 3000K


Luminaire Flux	714 lm	Luminaire Power	8.5 W	Efficacy	84.000 lm/W	Efficiency	100.00%
Source Flux	714 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	300 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	270 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.006210 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001502 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		714 lm	

LED Flux=894lm LED Power=8.5W Eff=80% EfcLed=105lm/W EfcLum=84lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E. 0 0 0 0 100
 F UTE 1.00 T

D DIN 5040 --
 B NBN BZ 10

300mm x 43mm




Semipiani C

180.0 ——— 0.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

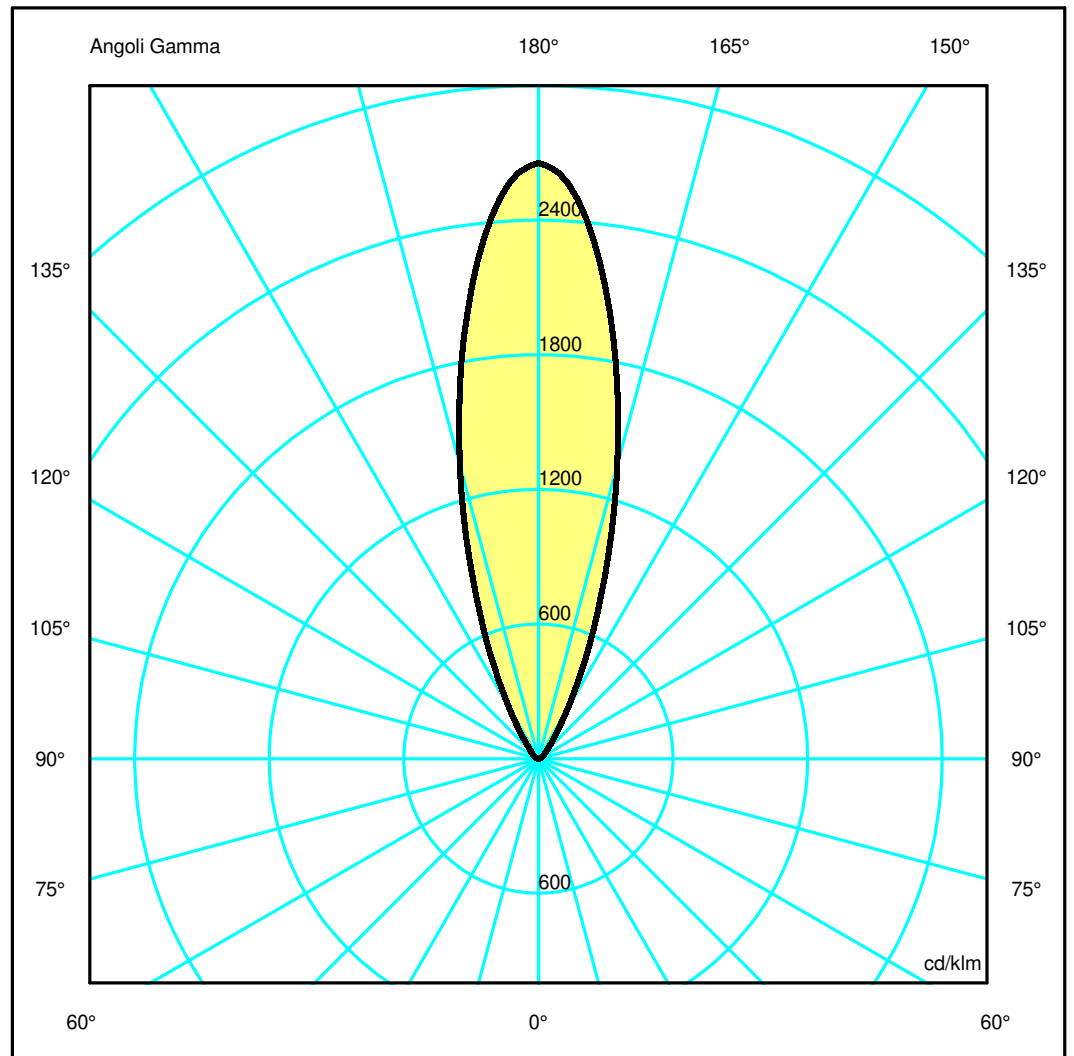

Luminaire

Code NL1732025K0
Name LineaLed Wallwasher 30 - FLOOD - 3000K

Measurment

Code FTS1601646-A
Name LineaLed Wallwasher 30 - FLOOD - 3000K

Luminaire Flux	714 lm	Luminaire Power	8.5 W	Efficacy	84.000 lm/W	Efficiency	100.00%
Source Flux	714 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	300 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	270 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.006210 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001502 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		714 lm	

LED Flux=894lm LED Power=8.5W Eff=80% EfcLed=105lm/W EfcLum=84lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h


C.I.E. 0 0 0 0 100
F UTE 1.00 T

D DIN 5040 --
B NBN BZ 10

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.09	1.36	OC	0.27	0.55	0.82	1.09	1.36
OB	0.27	0.55	0.82	1.09	1.36	OD	0.27	0.55	0.82	1.09	1.36

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1896.77	1727.79	967.67	356.22	99.23	36.48	19.60	11.09	5.06	1.11
OB	1896.77	1727.79	967.67	356.22	99.23	36.48	19.60	11.09	5.06	1.11
OC	1896.77	1727.79	967.67	356.22	99.23	36.48	19.60	11.09	5.06	1.11
OD	1896.77	1727.79	967.67	356.22	99.23	36.48	19.60	11.09	5.06	1.11

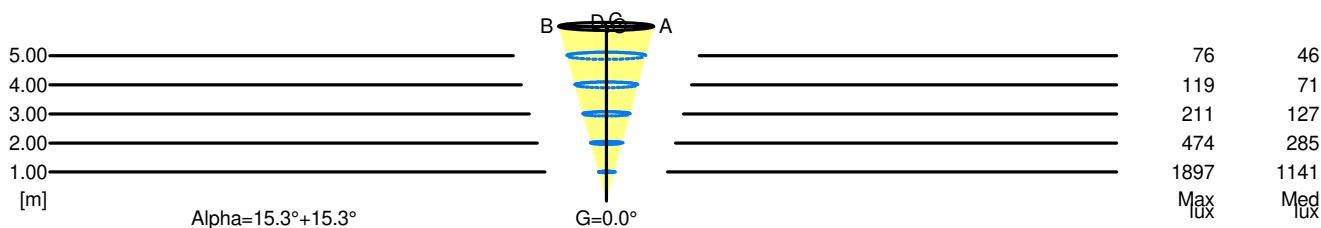

5.00	2.73	76	46	
4.00	2.18	119	71	
3.00	1.64	211	127	
2.00	1.09	474	285	
1.00	0.55	1897	1141	
H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3° G=0.0