


Luminaire

Code NL1906480K002
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Measurem.

Code FTS1601849
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 75 mm Diam. 55 mm	Height	90 mm	Height	0 mm		
Horizontal Luminous Area	0.002376 m2	Emitting area on Plane 180°			0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°			0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.000575 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	20-01-2015	Maximum Gamma Angle			90		
Measurement Distance	0.00	Measurement Flux			1073.52 lm		
LED Flux=1512lm LED Power=12W Eff=71% EfcLed=126lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	83 98 100 100 100	D DIN 5040			A60		
F UTE	1.00 B	B NBN			BZ 1		

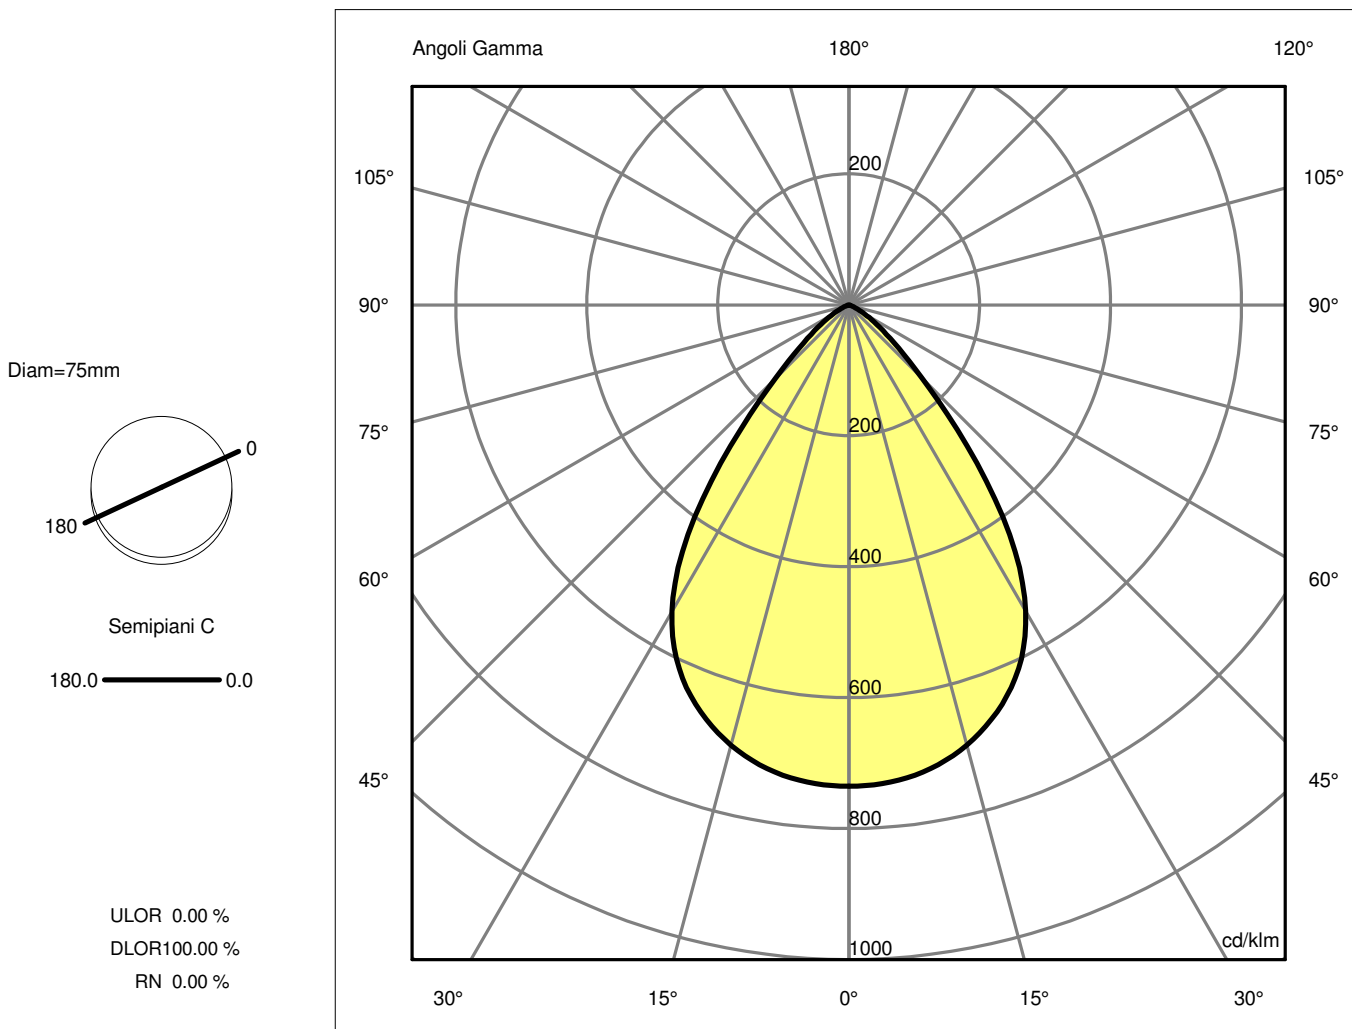

Luminaire

Code NL1906480K002
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Measurement


Code FTS1601849
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	75 mm 55 mm	Height Height	90 mm 0 mm		
Horizontal Luminous Area	0.002376 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000575 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	20-01-2015			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	1073.52 lm		
LED Flux=1512lm LED Power=12W Eff=71% EfcLed=126lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	83 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.76	1.51	2.27	3.03	3.78	OC	0.76	1.51	2.27	3.03	3.78
OB	0.76	1.51	2.27	3.03	3.78	OD	0.76	1.51	2.27	3.03	3.78

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OB	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OC	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OD	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23

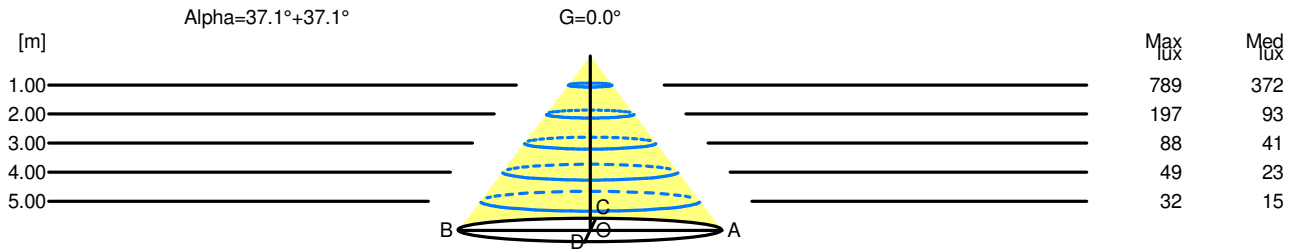

H[m]	D[m]	Max lux	Med lux	Alpha=37.1°+37.1°	G=0.0
1.00	1.51	789	372		
2.00	3.03	197	93		
3.00	4.54	88	41		
4.00	6.05	49	23		
5.00	7.57	32	15		

Luminaire

Code NL1906480K002
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Measurement

Code FTS1601849
 Name Parabola 80 Adjustable 80° finitura grigia 3000K

Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	24.8	25.7	25.1	25.9	26.1	24.8	25.7	25.1	25.9	26.1
x=2H y=3H	24.7	25.5	25.0	25.7	26.0	24.7	25.5	25.0	25.7	26.0
x=2H y=4H	24.7	25.4	25.0	25.6	25.9	24.7	25.4	25.0	25.6	25.9
x=2H y=6H	24.6	25.2	24.9	25.5	25.8	24.6	25.2	24.9	25.5	25.8
x=2H y=8H	24.6	25.2	24.9	25.5	25.8	24.6	25.2	24.9	25.5	25.8
x=2H y=12H	24.5	25.1	24.9	25.4	25.7	24.5	25.1	24.9	25.4	25.7
x=4H y=2H	24.7	25.4	25.0	25.7	26.0	24.7	25.4	25.0	25.7	26.0
x=4H y=3H	24.7	25.2	25.0	25.5	25.9	24.7	25.2	25.0	25.5	25.9
x=4H y=4H	24.6	25.1	25.0	25.4	25.8	24.6	25.1	25.0	25.4	25.8
x=4H y=6H	24.5	24.9	24.9	25.3	25.7	24.5	24.9	24.9	25.3	25.7
x=4H y=8H	24.5	24.9	24.9	25.2	25.6	24.5	24.9	24.9	25.2	25.6
x=4H y=12H	24.4	24.8	24.9	25.2	25.6	24.4	24.8	24.9	25.2	25.6
x=8H y=4H	24.5	24.9	24.9	25.2	25.6	24.5	24.9	24.9	25.2	25.6
x=8H y=6H	24.4	24.7	24.9	25.1	25.6	24.4	24.7	24.9	25.1	25.6
x=8H y=8H	24.4	24.6	24.8	25.1	25.5	24.4	24.6	24.8	25.1	25.5
x=8H y=12H	24.3	24.5	24.8	25.0	25.5	24.3	24.5	24.8	25.0	25.5
x=12H y=4H	24.4	24.8	24.9	25.2	25.6	24.4	24.8	24.9	25.2	25.6
x=12H y=6H	24.4	24.6	24.8	25.1	25.5	24.4	24.6	24.8	25.1	25.5
x=12H y=8H	24.3	24.5	24.8	25.0	25.5	24.3	24.5	24.8	25.0	25.5