

Luminaire

Code M250011
Name TAGORA 970 INC. LED DIMM. DALI 3000K ARANCIONE

Measurement

Code FTS2300136
Name TAGORA 970 INC. LED DIMM. DALI 3000K ARANCIONE

Luminaire Flux	6249 lm	Luminaire Power	84.0 W	Efficacy	74.394 lm/W	Efficiency	100.00%
Source Flux	6249 lm	Maximum value	373.95 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	970 mm	Height	235 mm		
Round Luminous Area		Diam.	830 mm	Height	0 mm		
Horizontal Luminous Area			0.541061 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.130894 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		30-05-2022		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			6249 lm
LED Flux=12819lm LED Power=74W Eff=49% EfcLed=173lm/W EfcLum=74lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=70000h							
C.I.E.	50 83 98 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

Diam=970mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

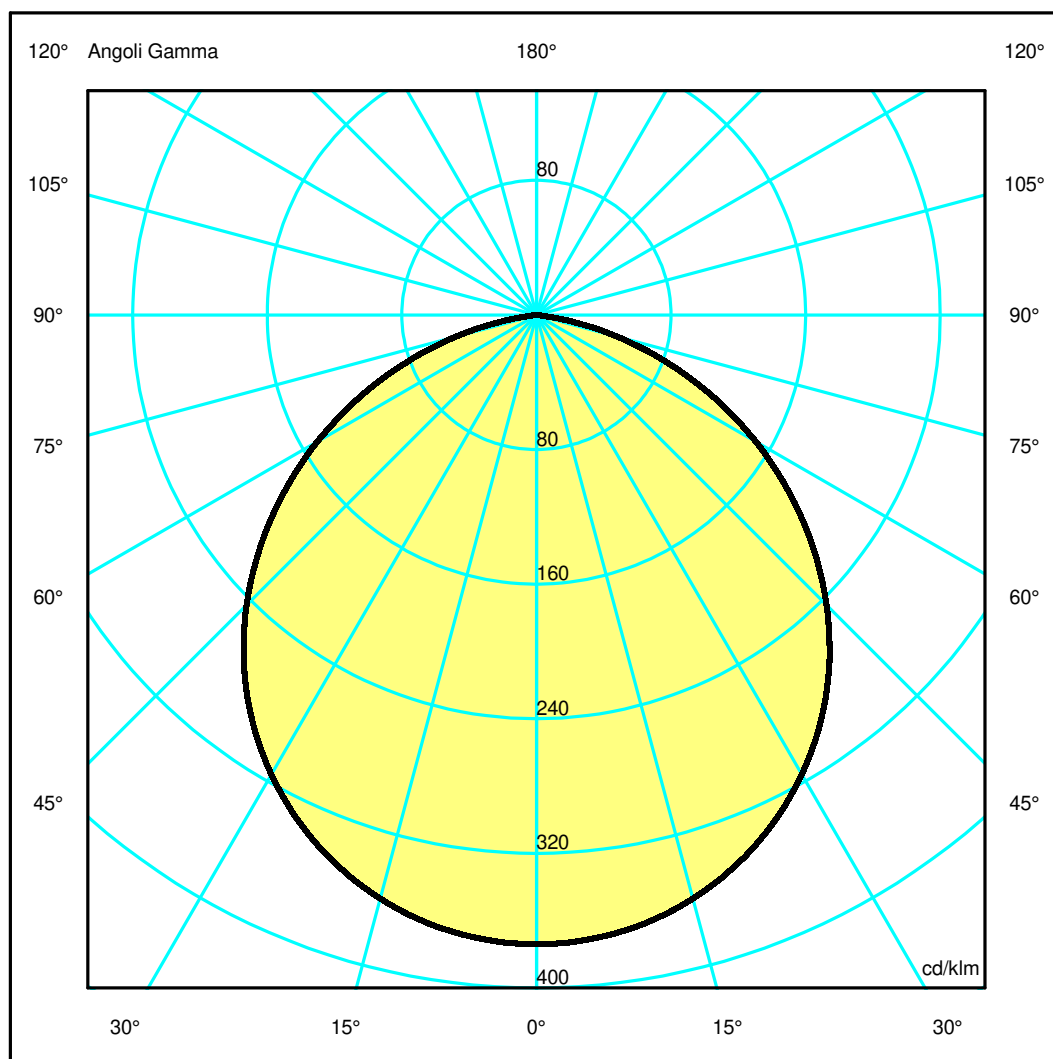

Luminaire

Code M250011
Name TAGORA 970 INC. LED DIMM. DALI 3000K ARANCIONE

Measur.


Code FTS2300136
Name TAGORA 970 INC. LED DIMM. DALI 3000K ARANCIONE

Luminaire Flux	6249 lm	Luminaire Power	84.0 W	Efficacy	74.394 lm/W	Efficiency	100.00%
Source Flux	6249 lm	Maximum value	373.95 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	970 mm	Height	235 mm		
Round Luminous Area		Diam.	830 mm	Height	0 mm		
Horizontal Luminous Area		0.541061 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.130894 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-05-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6249 lm	
LED Flux=12819lm LED Power=74W Eff=49% EfcLed=173lm/W EfcLum=74lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=70000h							
C.I.E.	50 83 98 100 100			D DIN 5040		A30	
F UTE	1.00 E			B NBN		BZ 4	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.40	2.79	4.19	5.59	6.98	OC	1.40	2.79	4.19	5.59	6.98
OB	1.40	2.79	4.19	5.59	6.98	OD	1.40	2.79	4.19	5.59	6.98

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2336.86	2326.52	2244.13	2080.85	1840.87	1523.09	1144.33	729.68	312.82	18.74
OB	2336.86	2326.52	2244.13	2080.85	1840.87	1523.09	1144.33	729.68	312.82	18.74
OC	2336.86	2326.52	2244.13	2080.85	1840.87	1523.09	1144.33	729.68	312.82	18.74
OD	2336.86	2326.52	2244.13	2080.85	1840.87	1523.09	1144.33	729.68	312.82	18.74

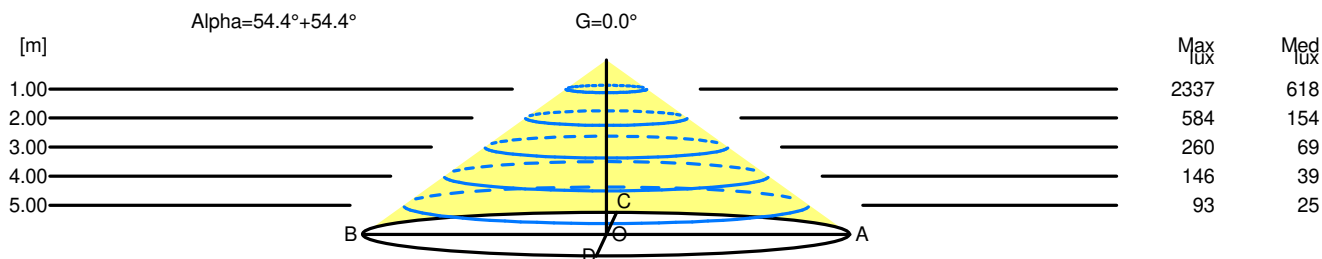

H[m]	D[m]	Max lux	Med lux	Alpha=54.4°+54.4°	G=0.0
1.00	2.79	2337	618		
2.00	5.59	584	154		
3.00	8.38	260	69		
4.00	11.18	146	39		
5.00	13.97	93	25		