

Luminaire

Code T086300
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE

Measurerm.

Code FTS1602855
Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE


Luminaire Flux	1263 lm	Luminaire Power	23.0 W	Efficacy	54.912 lm/W	Efficiency	100.00%
Source Flux	1263 lm	Maximum value	1455.37 cd/klm	Position	C=270.00 G=70.00	CG Sym. on planes 270-90	
Round Luminaire		Diam.	100 mm	Height	180 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.001216 m2		
Coordinate system		CG Roads		Symmetry Type	Sym. on planes 270-90		
Date		01-12-2021		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	1263 lm		

LED Flux=2731lm LED Power=21W Eff=46% EfcLed=133lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h


C.I.E. 3 20 69 90 100

D DIN 5040

B11

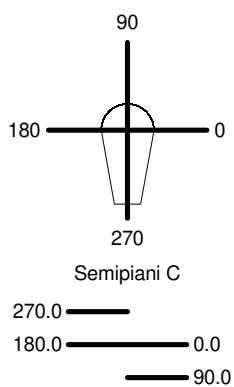

ULOR 10.44 %
DLOR 89.56 %
RN 10.44 %

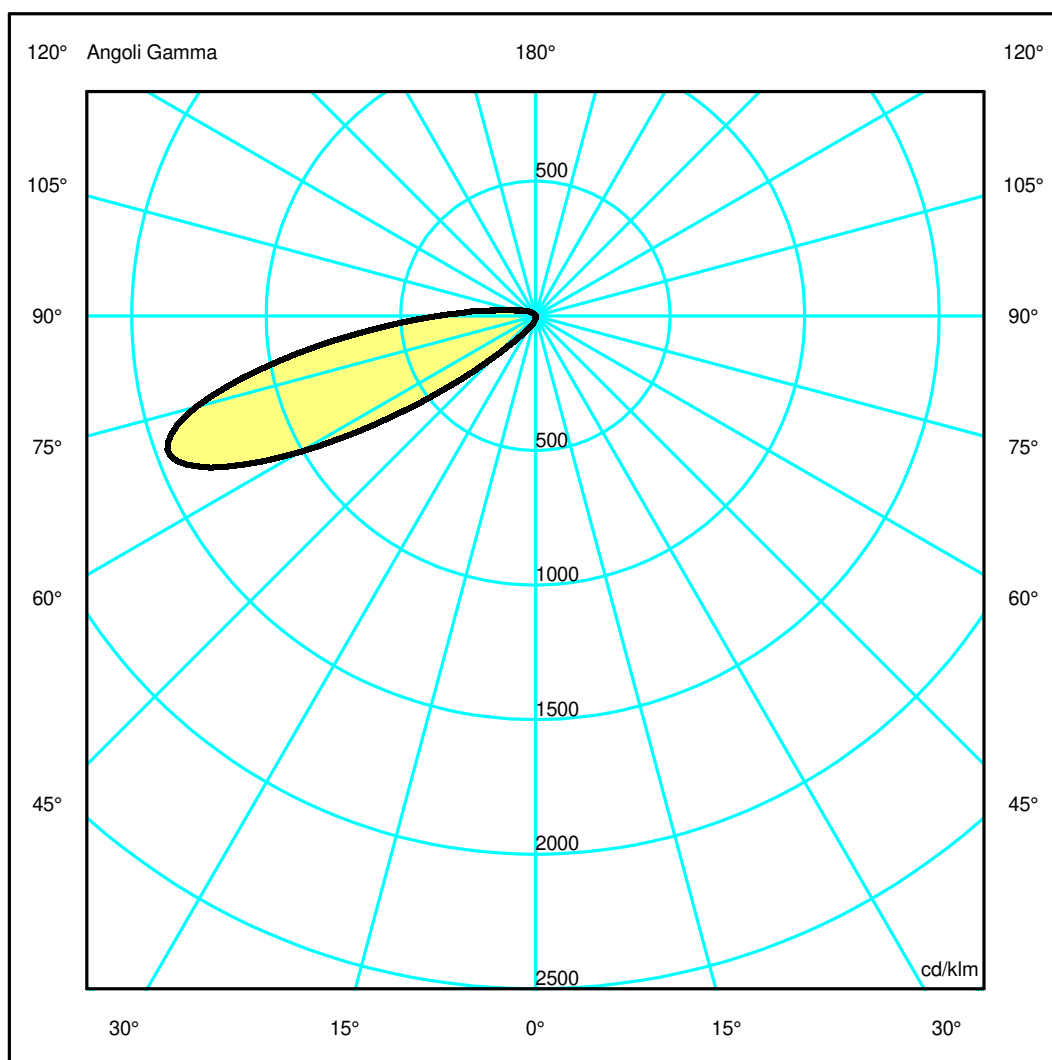

Luminaire

Code T086300
 Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE

Measurem.

Code FTS1602855
 Name OBLIQUE LED BOLLARD H750 14W 3000K ANTRACITE

Luminaire Flux	1263 lm	Luminaire Power	23.0 W	Efficacy	54.912 lm/W	Efficiency	100.00%
Source Flux	1263 lm	Maximum value	1455.37 cd/klm	Position	C=270.00 G=70.00	CG Sym. on planes 270-90	
Round Luminaire		Diam.	100 mm	Height	180 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		01-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1263 lm	
LED Flux=2731lm LED Power=21W Eff=46% EfcLed=133lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	3 20 69 90 100			D DIN 5040	B11		

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0

Could not find 90270 left beam angle•gamma0180=0