


Luminaire

Code NL1907260K006
Name Parabola 100 Round 60° finitura bianca 3000K

Measurem.

Code FTS1601864
Name Parabola 100 Round 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 100 mm Diam. 75 mm	Height	100 mm	Height	100 mm 0 mm		
Horizontal Luminous Area	0.004418 m2	Emitting area on Plane 180°			0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°			0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.001069 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	12-12-2014	Maximum Gamma Angle			90		
Measurement Distance	0.00	Measurement Flux			1533.09 lm		
LED Flux=2103lm LED Power=17W Eff=72,9% EfcLed=124lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	75 94 99 100 100	D DIN 5040			A60		
F UTE	1.00 B	B NBN			BZ 1 / 4 / BZ 2		

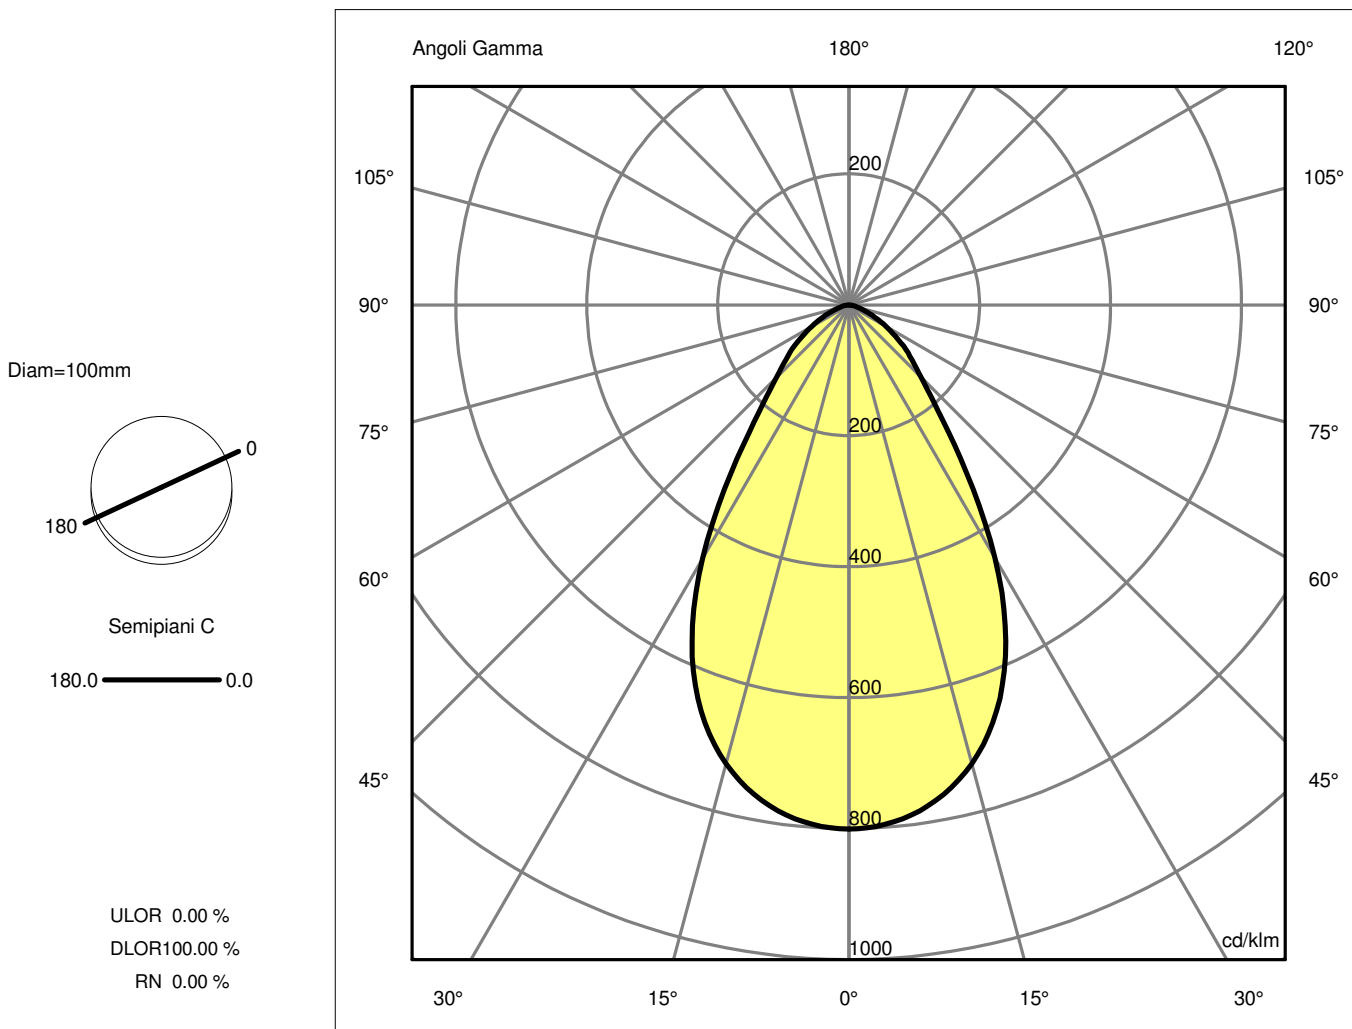

Luminaire

Code NL1907260K006
Name Parabola 100 Round 60° finitura bianca 3000K

Measurerm.


Code FTS1601864
Name Parabola 100 Round 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 75 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 12-12-2014 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 1533.09 lm	
LED Flux=2103lm LED Power=17W Eff=72,9% EfcLed=124lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	75 94 99 100 100 1.00 B			D DIN 5040 B NBN	A60 BZ 1 / 4 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.62	1.24	1.86	2.47	3.09	OC	0.62	1.24	1.86	2.47	3.09
OB	0.62	1.24	1.86	2.47	3.09	OD	0.62	1.24	1.86	2.47	3.09

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OB	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OC	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OD	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33

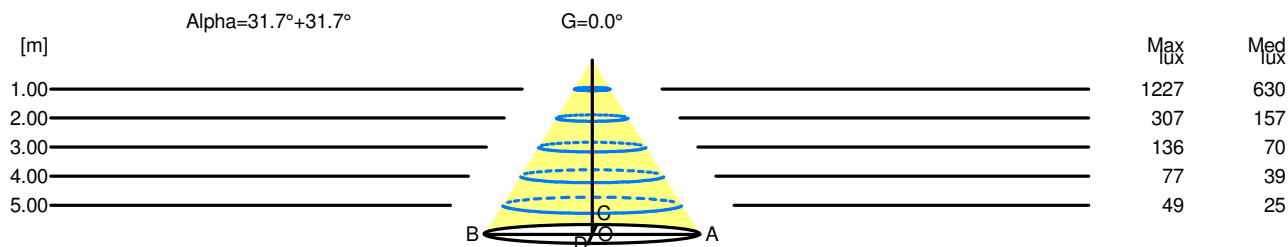

H[m]	D[m]	Max lux	Med lux	Alpha=31.7°+31.7°	G=0.0
1.00	1.24	1227	630		
2.00	2.47	307	157		
3.00	3.71	136	70		
4.00	4.95	77	39		
5.00	6.18	49	25		

Luminaire

Code NL1907260K006
Name Parabola 100 Round 60° finitura bianca 3000K

Measurerm.

Code FTS1601864
Name Parabola 100 Round 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	24.8	25.7	25.0	25.9	26.1	24.8	25.7	25.0	25.9	26.1
x=2H y=3H	25.2	26.1	25.5	26.3	26.6	25.2	26.1	25.5	26.3	26.6
x=2H y=4H	25.4	26.2	25.7	26.4	26.7	25.4	26.2	25.7	26.4	26.7
x=2H y=6H	25.4	26.1	25.7	26.4	26.7	25.4	26.1	25.7	26.4	26.7
x=2H y=8H	25.4	26.1	25.7	26.4	26.7	25.4	26.1	25.7	26.4	26.7
x=2H y=12H	25.4	26.0	25.7	26.3	26.7	25.4	26.0	25.7	26.3	26.7
x=4H y=2H	25.1	25.9	25.4	26.1	26.4	25.1	25.9	25.4	26.1	26.4
x=4H y=3H	25.7	26.3	26.0	26.6	27.0	25.7	26.3	26.0	26.6	27.0
x=4H y=4H	25.8	26.4	26.2	26.7	27.1	25.8	26.4	26.2	26.7	27.1
x=4H y=6H	25.9	26.4	26.3	26.8	27.1	25.9	26.4	26.3	26.8	27.1
x=4H y=8H	25.9	26.4	26.3	26.7	27.1	25.9	26.4	26.3	26.7	27.1
x=4H y=12H	25.9	26.3	26.4	26.7	27.1	25.9	26.3	26.4	26.7	27.1
x=8H y=4H	25.9	26.3	26.3	26.7	27.1	25.9	26.3	26.3	26.7	27.1
x=8H y=6H	26.0	26.3	26.4	26.7	27.2	26.0	26.3	26.4	26.7	27.2
x=8H y=8H	26.0	26.3	26.5	26.7	27.2	26.0	26.3	26.5	26.7	27.2
x=8H y=12H	26.0	26.3	26.5	26.7	27.2	26.0	26.3	26.5	26.7	27.2
x=12H y=4H	25.8	26.2	26.3	26.6	27.1	25.8	26.2	26.3	26.6	27.1
x=12H y=6H	26.0	26.3	26.4	26.7	27.2	26.0	26.3	26.4	26.7	27.2
x=12H y=8H	26.0	26.2	26.5	26.7	27.2	26.0	26.2	26.5	26.7	27.2