

## Luminaire

Code NL1906380K002  
 Name Parabola 80 Round 80° finitura grigia 3000K

## Measurem.

Code FTS1601795  
 Name Parabola 80 Round 80° finitura grigia 3000K


Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	75 mm 55 mm	Height Height	90 mm 0 mm		
Horizontal Luminous Area	0.002376 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.000575 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	20-01-2015			Maximum Gamma Angle		90	
Measurement Distance	0.00			Measurement Flux		1073.52 lm	

LED Flux=1512lm LED Power=12W Eff=71% EfcLed=126lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h

C.I.E. 83 98 100 100 100  
 F UTE 1.00 B

D DIN 5040 A60  
 B NBN BZ 1


Diam=75mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

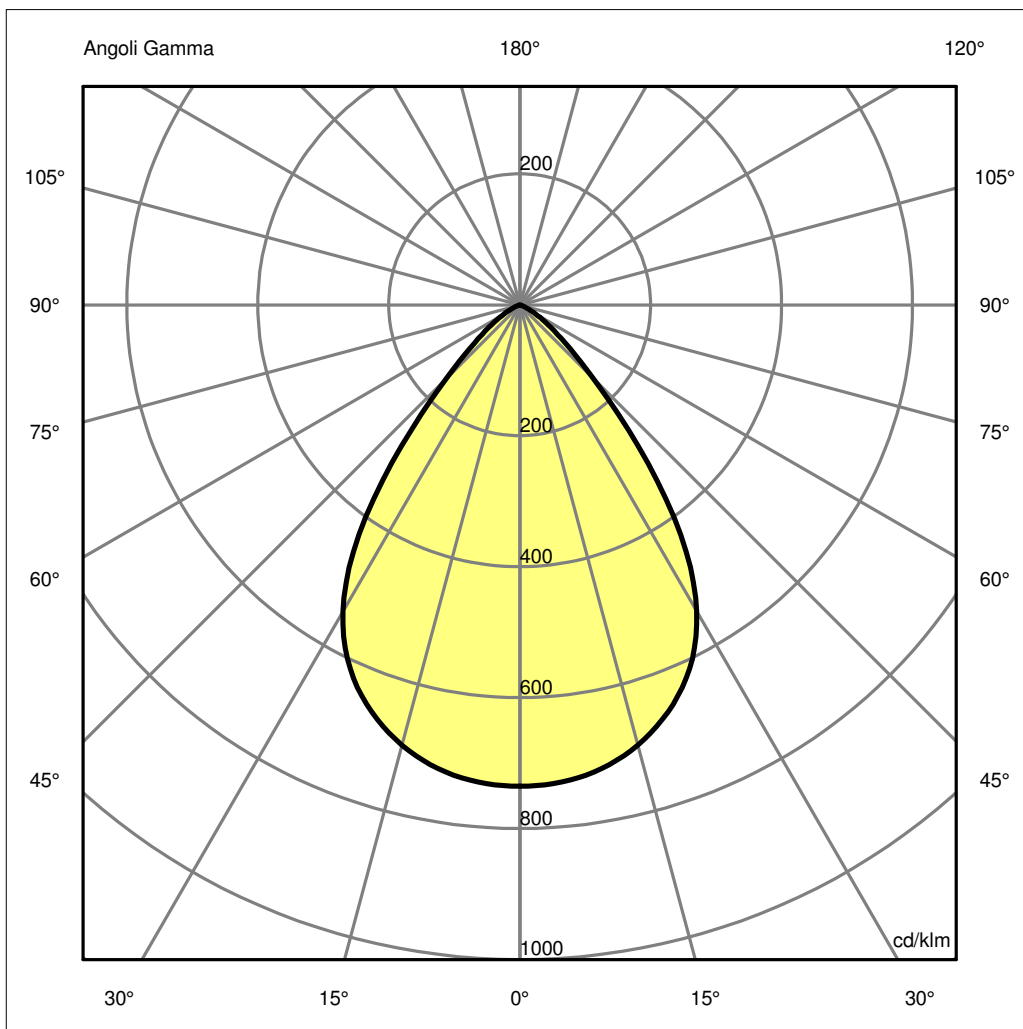

## Luminaire

Code NL1906380K002  
Name Parabola 80 Round 80° finitura grigia 3000K

## Measurerm.

Code FTS1601795  
Name Parabola 80 Round 80° finitura grigia 3000K

Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	75 mm 55 mm	Height Height	90 mm 0 mm		
Horizontal Luminous Area	0.002376 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.000575 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	20-01-2015			Maximum Gamma Angle		90	
Measurement Distance	0.00			Measurement Flux		1073.52 lm	


LED Flux=1512lm LED Power=12W Eff=71% EfcLed=126lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h

C.I.E.	83 98 100 100 100			D DIN 5040	A60
F UTE	1.00 B			B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.76	1.51	2.27	3.03	3.78	OC	0.76	1.51	2.27	3.03	3.78
OB	0.76	1.51	2.27	3.03	3.78	OD	0.76	1.51	2.27	3.03	3.78

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OB	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OC	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23
OD	789.23	785.20	747.08	658.19	459.51	169.47	56.26	14.31	1.58	0.23

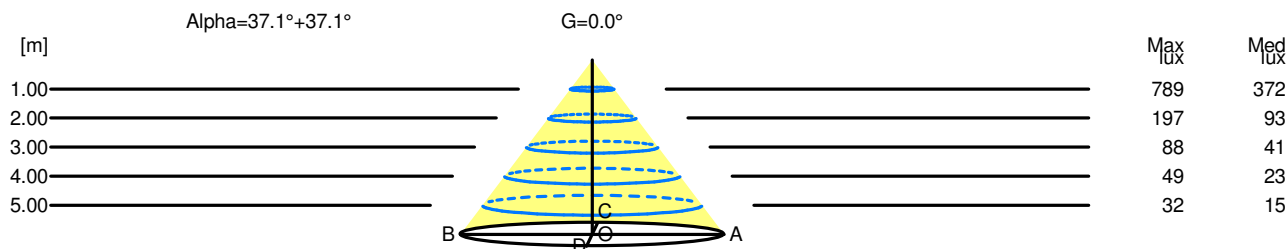

H[m]	D[m]	Max lux	Med lux	Alpha=37.1°+37.1°	G=0.0
1.00	1.51	789	372		
2.00	3.03	197	93		
3.00	4.54	88	41		
4.00	6.05	49	23		
5.00	7.57	32	15		

**Luminaire**

Code NL1906380K002  
 Name Parabola 80 Round 80° finitura grigia 3000K

**Measurement**

Code FTS1601795  
 Name Parabola 80 Round 80° finitura grigia 3000K

Luminaire Flux	1073.52 lm	Luminaire Power	12.00 W	Efficacy	89.46 lm/W	Efficiency	100.00%
Lamps Flux	1073.52 lm	Maximum value	735.18 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**UGR**  
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	24.8	25.7	25.1	25.9	26.1	24.8	25.7	25.1	25.9	26.1
x=2H y=3H	24.7	25.5	25.0	25.7	26.0	24.7	25.5	25.0	25.7	26.0
x=2H y=4H	24.7	25.4	25.0	25.6	25.9	24.7	25.4	25.0	25.6	25.9
x=2H y=6H	24.6	25.2	24.9	25.5	25.8	24.6	25.2	24.9	25.5	25.8
x=2H y=8H	24.6	25.2	24.9	25.5	25.8	24.6	25.2	24.9	25.5	25.8
x=2H y=12H	24.5	25.1	24.9	25.4	25.7	24.5	25.1	24.9	25.4	25.7
x=4H y=2H	24.7	25.4	25.0	25.7	26.0	24.7	25.4	25.0	25.7	26.0
x=4H y=3H	24.7	25.2	25.0	25.5	25.9	24.7	25.2	25.0	25.5	25.9
x=4H y=4H	24.6	25.1	25.0	25.4	25.8	24.6	25.1	25.0	25.4	25.8
x=4H y=6H	24.5	24.9	24.9	25.3	25.7	24.5	24.9	24.9	25.3	25.7
x=4H y=8H	24.5	24.9	24.9	25.2	25.6	24.5	24.9	24.9	25.2	25.6
x=4H y=12H	24.4	24.8	24.9	25.2	25.6	24.4	24.8	24.9	25.2	25.6
x=8H y=4H	24.5	24.9	24.9	25.2	25.6	24.5	24.9	24.9	25.2	25.6
x=8H y=6H	24.4	24.7	24.9	25.1	25.6	24.4	24.7	24.9	25.1	25.6
x=8H y=8H	24.4	24.6	24.8	25.1	25.5	24.4	24.6	24.8	25.1	25.5
x=8H y=12H	24.3	24.5	24.8	25.0	25.5	24.3	24.5	24.8	25.0	25.5
x=12H y=4H	24.4	24.8	24.9	25.2	25.6	24.4	24.8	24.9	25.2	25.6
x=12H y=6H	24.4	24.6	24.8	25.1	25.5	24.4	24.6	24.8	25.1	25.5
x=12H y=8H	24.3	24.5	24.8	25.0	25.5	24.3	24.5	24.8	25.0	25.5