

Luminaire


Code DD0014B00C3W
 Name UNA PRO 16 LED C/W 3000K/WFL - ALU

Measurerm.

Code FTS1600521-A
 Name UNA PRO 16 LED C/W 3000K/WFL - ALU

Luminaire Flux	1399 lm	Luminaire Power	20.0 W	Efficacy	69.942 lm/W	Efficiency	100.00%
Source Flux	1399 lm	Maximum value	2156.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	20 mm
Rectangular Luminous Area		Length	106 mm	Width	106 mm	Height	0 mm
Horizontal Luminous Area		0.011236 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002718 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		19-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1399 lm	
LED Flux=1904lm LED Power=15W Eff=73% EfcLed=125lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h							
C.I.E.	93 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


150mm x 150mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

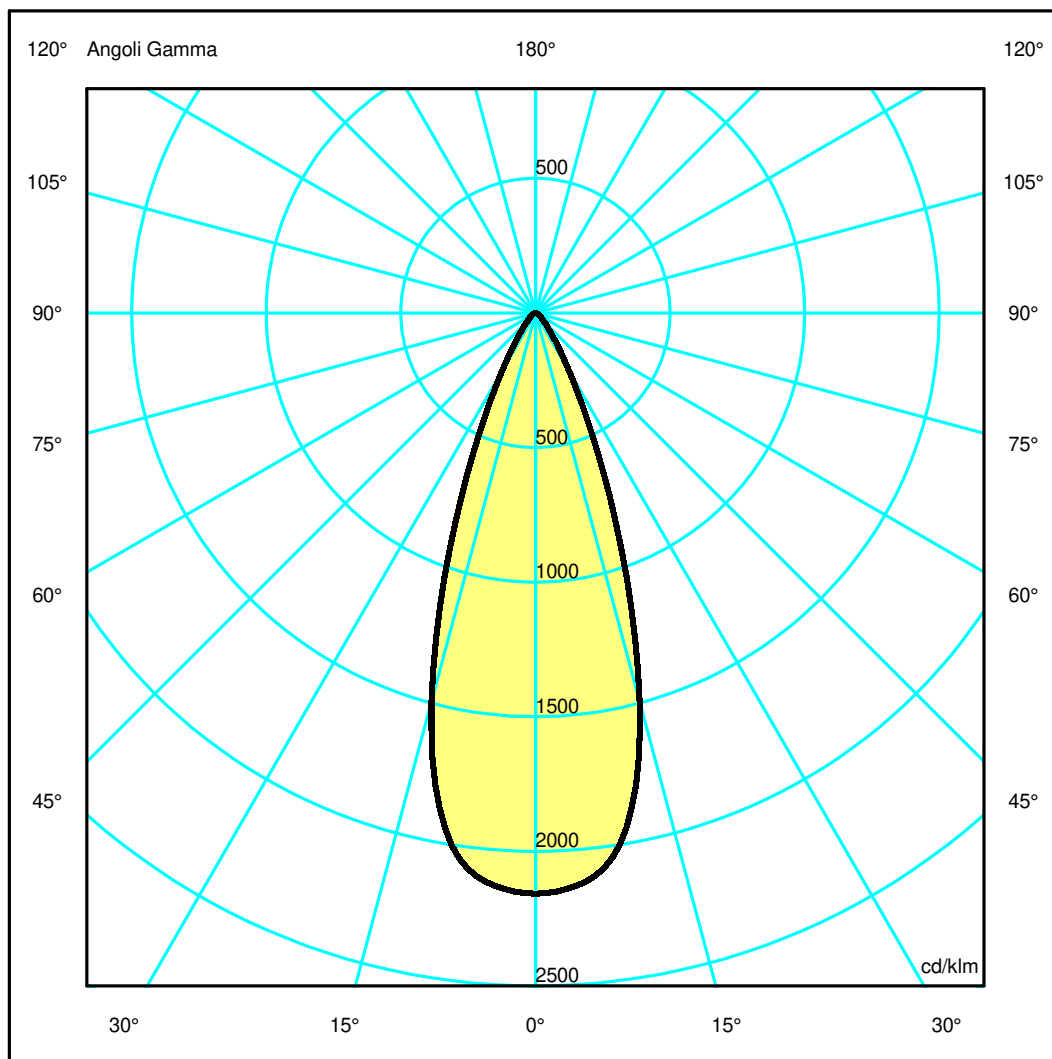

Luminaire

Code DD0014B00C3W
Name UNA PRO 16 LED C/W 3000K/WFL - ALU

Measurem.

Code FTS1600521-A
Name UNA PRO 16 LED C/W 3000K/WFL - ALU

Luminaire Flux	1399 lm	Luminaire Power	20.0 W	Efficacy	69.942 lm/W	Efficiency	100.00%
Source Flux	1399 lm	Maximum value	2156.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	150 mm	Width	150 mm	Height	20 mm
Rectangular Luminous Area		Length	106 mm	Width	106 mm	Height	0 mm
Horizontal Luminous Area		0.011236 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002718 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		19-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1399 lm	


LED Flux=1904lm LED Power=15W Eff=73% EfcLed=125lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=272160h

C.I.E.	93 98 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.34	0.68	1.01	1.35	1.69	OC	0.34	0.68	1.01	1.35	1.69
OB	0.34	0.68	1.01	1.35	1.69	OD	0.34	0.68	1.01	1.35	1.69

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3017.13	2966.33	2087.54	696.48	184.01	59.81	31.27	19.29	9.76	2.06
OB	3017.13	2966.33	2087.54	696.48	184.01	59.81	31.27	19.29	9.76	2.06
OC	3017.13	2966.33	2087.54	696.48	184.01	59.81	31.27	19.29	9.76	2.06
OD	3017.13	2966.33	2087.54	696.48	184.01	59.81	31.27	19.29	9.76	2.06

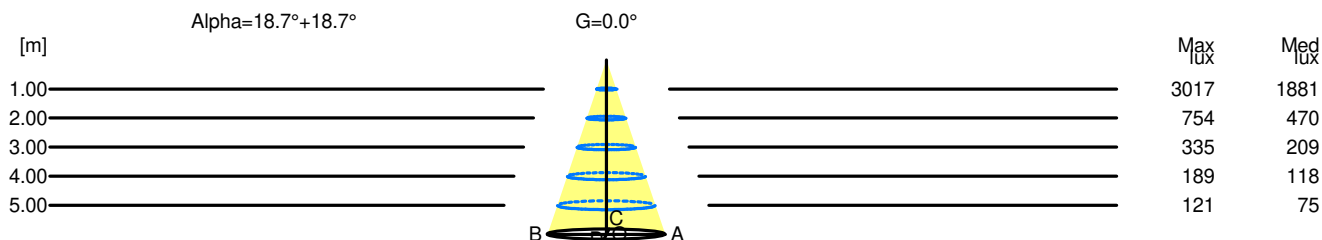

H[m]	D[m]	Max lux	Med lux	Alpha=18.7°+18.7°	G=0.0
1.00	0.68	3017	1881		
2.00	1.35	754	470		
3.00	2.03	335	209		
4.00	2.70	189	118		
5.00	3.38	121	75		