

## Luminaire

Code AT15001+AT09506  
 Name A.39 SOSP/PLAF L=2368MM 830 DIM BCO

## Measurement

Code FTS1801043-B  
 Name A.39 SOSP/PLAF L=2368MM 830 DIM BCO

Luminaire Flux	4749 lm	Luminaire Power	40.0 W	Efficacy	118.725 lm/W	Efficiency	100.00%
Source Flux	4749 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.022837 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		30-01-2024		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	4749 lm		


LED Flux=6780lm LED Power=35W Eff=70% EfcLed=193lm/W EfcLum=119lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 49 80 96 100 100  
 F UTE 1.00 E

D DIN 5040  
 B NBN

A30  
 BZ 4


2368mm x 45mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

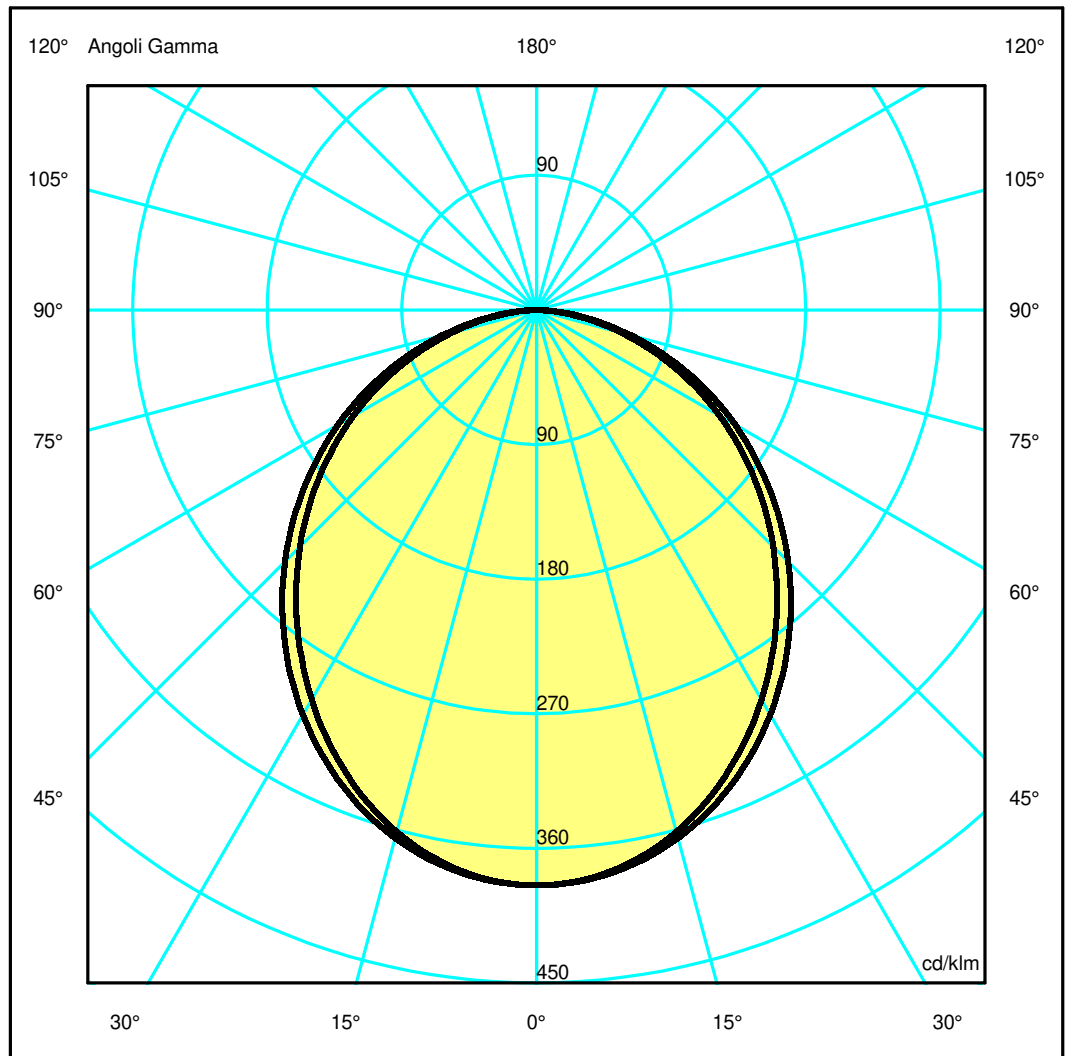

## Luminaire

Code AT15001+AT09506  
Name A.39 SOSP/PLAF L=2368MM 830 DIM BCO

## Measurerm.


Code FTS1801043-B  
Name A.39 SOSP/PLAF L=2368MM 830 DIM BCO

Luminaire Flux	4749 lm	Luminaire Power	40.0 W	Efficacy	118.725 lm/W	Efficiency	100.00%
Source Flux	4749 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.094400 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.022837 m2
Coordinate system	CG			Symmetry Type			Double Symmetrical
Date	30-01-2024			Maximum Gamma Angle			180
Measurement Distance	0.00			Measurement Flux			4749 lm
LED Flux=6780lm LED Power=35W Eff=70% EfcLed=193lm/W EfcLum=119lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.45	3.68	4.91	6.13	OC	1.34	2.67	4.01	5.35	6.69
OB	1.23	2.45	3.68	4.91	6.13	OD	1.34	2.67	4.01	5.35	6.69

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1827.02	1814.02	1715.49	1537.32	1311.89	1062.98	802.30	539.76	278.88	66.49
OB	1827.02	1814.02	1715.49	1537.32	1311.89	1062.98	802.30	539.76	278.88	66.49
OC	1827.02	1816.99	1735.89	1581.29	1375.55	1130.10	862.83	588.69	311.30	81.32
OD	1827.02	1816.99	1735.89	1581.29	1375.55	1130.10	862.83	588.69	311.30	81.32

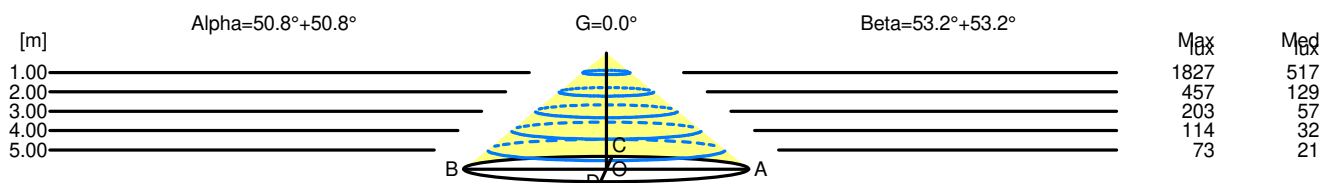

H[m]	D[m]	Max lux	Med lux	Alpha=50.8°+50.8°	G=0.0
1.00	2.45	1827	517		
2.00	4.91	457	129		
3.00	7.36	203	57		
4.00	9.81	114	32		
5.00	12.27	73	21		

H[m]	D[m]	Max lux	Med lux	Beta=53.2°+53.2°	G=0.0
1.00	2.67	1827	517		
2.00	5.35	457	129		
3.00	8.02	203	57		
4.00	10.70	114	32		
5.00	13.37	73	21		