


## Luminaire

Code AF25001+AF95204+AF0600  
 Name SHARP RECESSED TRIM 16X 48W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK + GRAZER LENS

## Measurerm.

Code FTS1901373  
 Name SHARP RECESSED TRIM 16X 48W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK + GRAZER LENS

Luminaire Flux	2655.85 lm	Luminaire Power	44.00 W	Efficacy	60.36 lm/W	Efficiency	100.00%
Lamps Flux	2655.85 lm	Maximum value	1615.43 cd/klm	Position	C=90.00 G=23.00	CG	Double Symmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		19-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2655.85 lm	
LED Flux=4245.28lm LED Power=44W Eff=63% EfcLed=96lm/W EfcLum=60lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

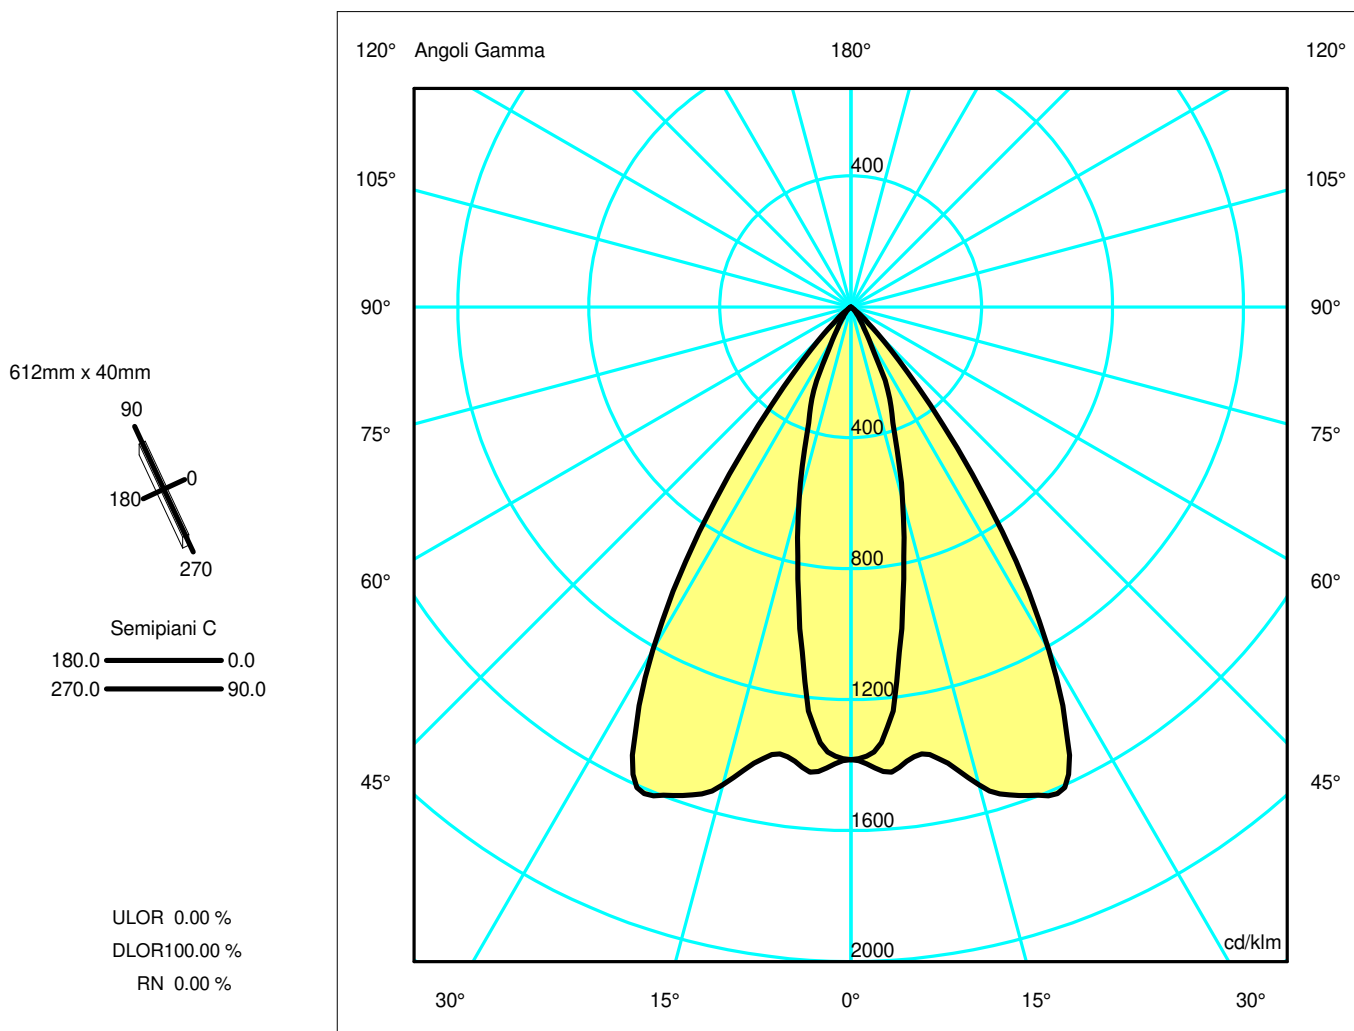

## Luminaire

Code AF25001+AF95204+AF0600  
 Name SHARP RECESSED TRIM 16X 48W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK + GRAZER LENS

## Measurerm.


Code FTS1901373  
 Name SHARP RECESSED TRIM 16X 48W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK + GRAZER LENS

Luminaire Flux	2655.85 lm	Luminaire Power	44.00 W	Efficacy	60.36 lm/W	Efficiency	100.00%
Lamps Flux	2655.85 lm	Maximum value	1615.43 cd/klm	Position	C=90.00 G=23.00	CG	Double Symmetrical
Rectangular Luminaire		Length	612 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.021904 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005299 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		19-07-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2655.85 lm	
LED Flux=4245.28lm LED Power=44W Eff=63% EfcLed=96lm/W EfcLum=60lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.48	0.72	0.96	1.20	OC	0.71	1.42	2.13	2.84	3.55
OB	0.24	0.48	0.72	0.96	1.20	OD	0.71	1.42	2.13	2.84	3.55

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3673.19	3421.40	1620.09	657.01	136.51	43.60	5.24	0.42	0.00	0.00
OB	3673.19	3421.40	1620.09	657.01	136.51	43.60	5.24	0.42	0.00	0.00
OC	3673.19	3787.71	4011.86	4183.45	1923.39	311.22	15.24	0.55	0.00	0.00
OD	3673.19	3787.71	4011.86	4183.45	1923.39	311.22	15.24	0.55	0.00	0.00

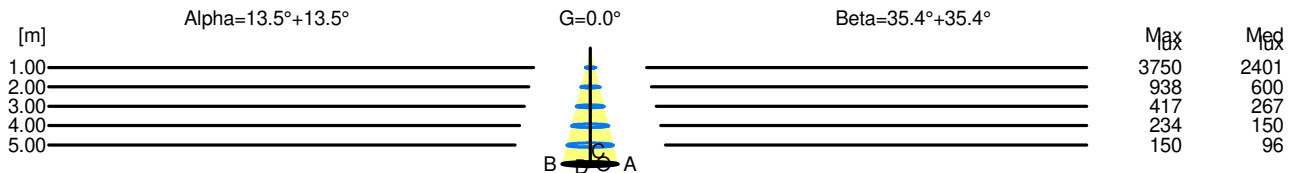

H[m]	D[m]	Max lux	Med lux	Alpha=13.5°+13.5°	G=0.0
1.00	0.48	3750	2401		
2.00	0.96	938	600		
3.00	1.44	417	267		
4.00	1.93	234	150		
5.00	2.41	150	96		

H[m]	D[m]	Max lux	Med lux	Beta=35.4°+35.4°	G=0.0
1.00	1.42	3750	2401		
2.00	2.84	938	600		
3.00	4.26	417	267		
4.00	5.68	234	150		
5.00	7.09	150	96		