

Luminaire

Code M257805_0°
Name EVERY 105 TRLS TD OR LED 3000K 2X14°ME_0°

Measurement

Code FTS2400241.
Name EVERY 105 TRLS TD OR LED 3000K 2X14°ME_0°

Luminaire Flux	1006 lm	Luminaire Power	10.0 W	Efficacy	100.600 lm/W	Efficiency	100.00%
Source Flux	1006 lm	Maximum value	2015.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area			0.005027 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001216 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1006 lm	
LED Flux=1556lm LED Power=10W Eff=65% EfcLed=156lm/W EfcLum=101lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=85mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

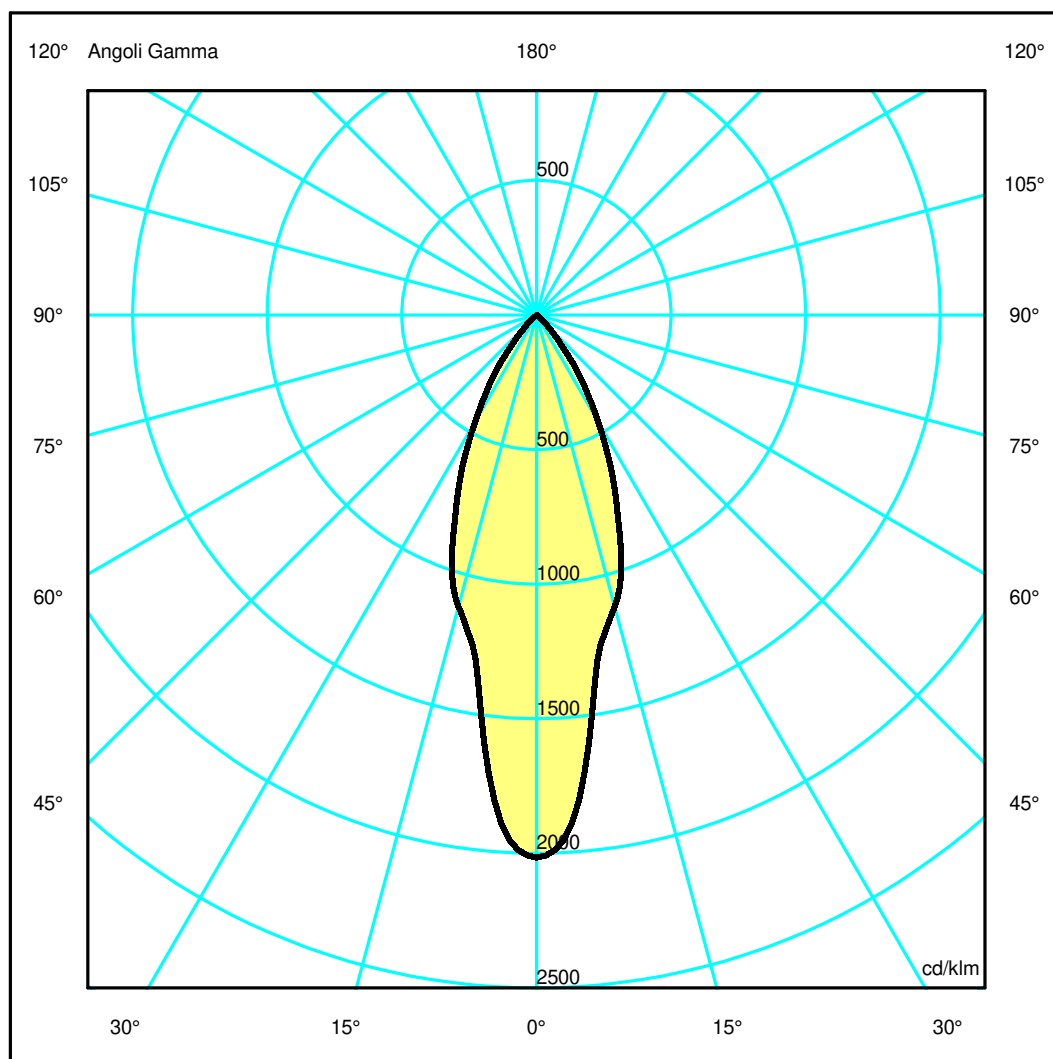

Luminaire

Code M257805_0°
Name EVERY 105 TRLS TD OR LED 3000K 2X14°ME_0°

Measurem.


Code FTS2400241.
Name EVERY 105 TRLS TD OR LED 3000K 2X14°ME_0°

Luminaire Flux	1006 lm	Luminaire Power	10.0 W	Efficacy	100.600 lm/W	Efficiency	100.00%
Source Flux	1006 lm	Maximum value	2015.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1006 lm	
LED Flux=1556lm LED Power=10W Eff=65% EfcLed=156lm/W EfcLum=101lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	96 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.98	1.31	1.64	OC	0.33	0.66	0.98	1.31	1.64
OB	0.33	0.66	0.98	1.31	1.64	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2027.43	1819.15	1127.93	676.13	287.89	56.42	0.72	0.33	0.26	0.24
OB	2027.43	1819.15	1127.93	676.13	287.89	56.42	0.72	0.33	0.26	0.24
OC	2027.43	1819.15	1127.93	676.13	287.89	56.42	0.72	0.33	0.26	0.24
OD	2027.43	1819.15	1127.93	676.13	287.89	56.42	0.72	0.33	0.26	0.24

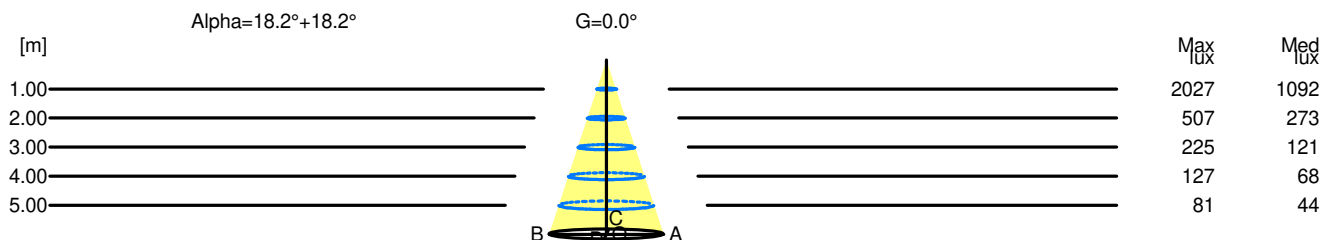

H[m]	D[m]	Max lux	Med lux	Alpha=18.2°+18.2°	G=0.0
1.00	0.66	2027	1092		
2.00	1.31	507	273		
3.00	1.97	225	121		
4.00	2.63	127	68		
5.00	3.28	81	44		