

## Luminaire

Code AQ47815  
Name A.24 SOSP.MOD.D+IN SHARP3000K XF 1176 BSV

## Measurement

Code FTS1802352-B  
Name A.24 SOSP.MOD.D+IN SHARP3000K XF 1176 BSV

Luminaire Flux	3526 lm	Luminaire Power	36.0 W	Efficacy	97.944 lm/W	Efficiency	100.00%
Source Flux	3526 lm	Maximum value	516.57 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000749 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3526 lm	


LED Flux=4488lm LED Power=33W Eff=79% EfcLed=135lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h

C.I.E. 98 100 100 49 100  
F UTE --

D DIN 5040  
B NBN

C62  
BZ 1

1176mm x 27mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 50.92 %

DLOR 49.08 %

RN 50.92 %

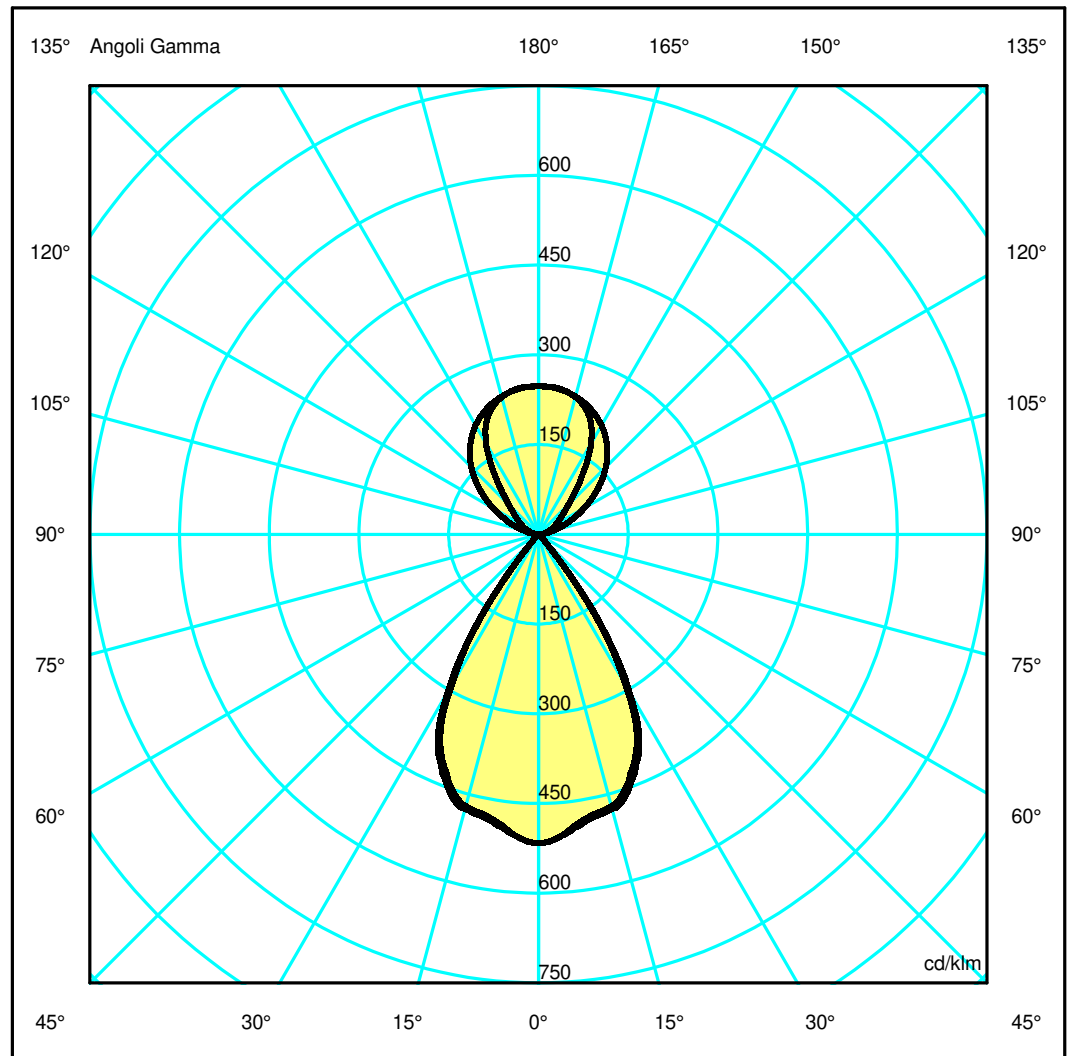

## Luminaire

Code AQ47815  
Name A.24 SOSP.MOD.D+IN SHARP3000K XF 1176 BSV

## Measurem.


Code FTS1802352-B  
Name A.24 SOSP.MOD.D+IN SHARP3000K XF 1176 BSV

Luminaire Flux	3526 lm	Luminaire Power	36.0 W	Efficacy	97.944 lm/W	Efficiency	100.00%
Source Flux	3526 lm	Maximum value	516.57 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000749 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3526 lm	
LED Flux=4488lm LED Power=33W Eff=79% EfcLed=135lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 49 100			D DIN 5040	C62		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.61	1.22	1.83	2.44	3.05	OC	0.62	1.24	1.87	2.49	3.11
OB	0.61	1.22	1.83	2.44	3.05	OD	0.62	1.24	1.87	2.49	3.11

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1821.43	1771.82	1658.93	1368.99	586.77	22.37	4.71	1.26	0.00	0.00
OB	1821.43	1771.82	1658.93	1368.99	586.77	22.37	4.71	1.26	0.00	0.00
OC	1821.43	1773.98	1674.42	1407.32	610.10	21.72	4.67	1.33	0.00	0.00
OD	1821.43	1773.98	1674.42	1407.32	610.10	21.72	4.67	1.33	0.00	0.00

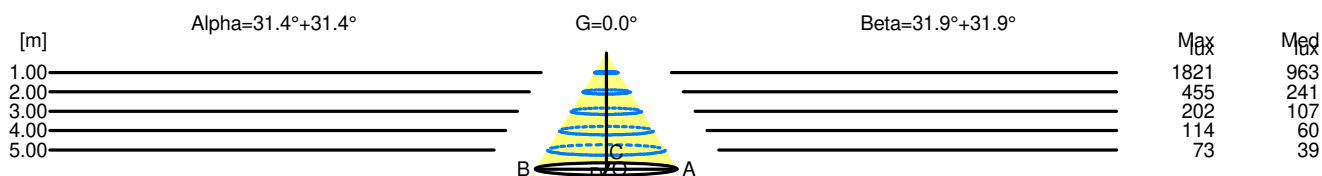

H[m]	D[m]	Max lux	Med lux	Alpha=31.4°+31.4°	G=0.0
1.00	1.22	1821	963		
2.00	2.44	455	241		
3.00	3.66	202	107		
4.00	4.88	114	60		
5.00	6.10	73	39		

H[m]	D[m]	Max lux	Med lux	Beta=31.9°+31.9°	G=0.0
1.00	1.24	1821	963		
2.00	2.49	455	241		
3.00	3.73	202	107		
4.00	4.98	114	60		
5.00	6.22	73	39		