

## Luminaire

Code BL30701  
Name HOY MODULO SPOT 3000K WF L=384 DALI BCO

## Measurement

Code FTS2000648  
Name HOY MODULO SPOT 3000K WF L=384 DALI BCO

Luminaire Flux	1914.65 lm	Luminaire Power	22.00 W	Efficacy	87.03 lm/W	Efficiency	100.00%
Sources Flux	1914.65 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	110 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area			0.004301 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001040 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		27-04-2021		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1914.65 lm

LED Flux=2253lm LED Power=19W Eff=85% EfcLed=118lm/W EfcLum=87lm/W CCT=3000 Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 92 99 100 100 100  
F UTE 1.00 A

D DIN 5040 A60  
B NBN BZ 1


Diam=90mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

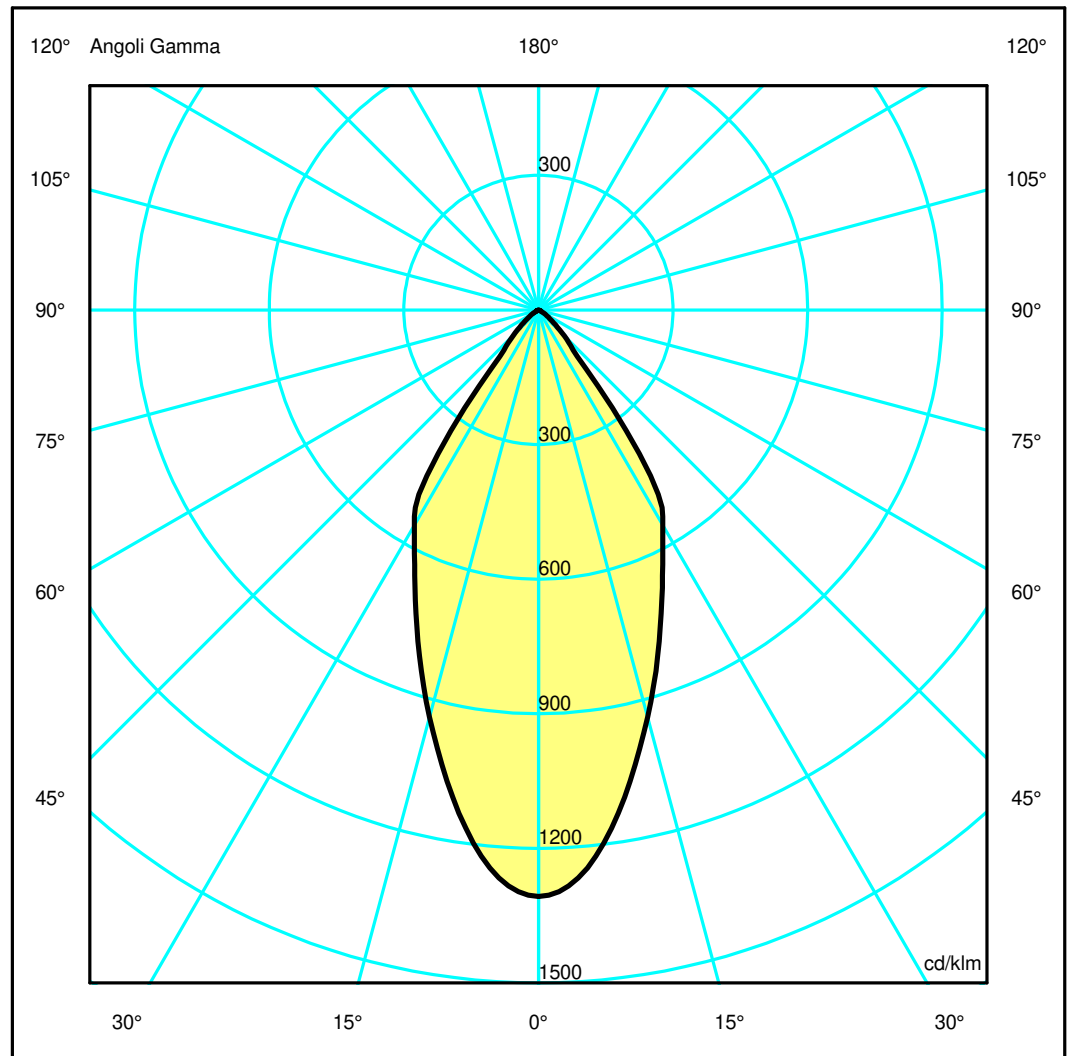

## Luminaire

Code BL30701  
Name HOY MODULO SPOT 3000K WF L=384 DALI BCO

## Measurerm.

Code FTS2000648  
Name HOY MODULO SPOT 3000K WF L=384 DALI BCO


Luminaire Flux	1914.65 lm	Luminaire Power	22.00 W	Efficacy	87.03 lm/W	Efficiency	100.00%
Sources Flux	1914.65 lm	Maximum value	1307.01 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	110 mm		
Round Luminous Area		Diam.	74 mm	Height	0 mm		
Horizontal Luminous Area		0.004301 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001040 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-04-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1914.65 lm	
LED Flux=2253lm LED Power=19W Eff=85% EfcLed=118lm/W EfcLum=87lm/W CCT=3000 Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	92 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.93	1.40	1.86	2.33	OC	0.47	0.93	1.40	1.86	2.33
OB	0.47	0.93	1.40	1.86	2.33	OD	0.47	0.93	1.40	1.86	2.33

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OB	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OC	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16
OD	2502.48	2389.54	1797.76	1250.86	748.93	155.40	45.68	12.65	2.65	0.16

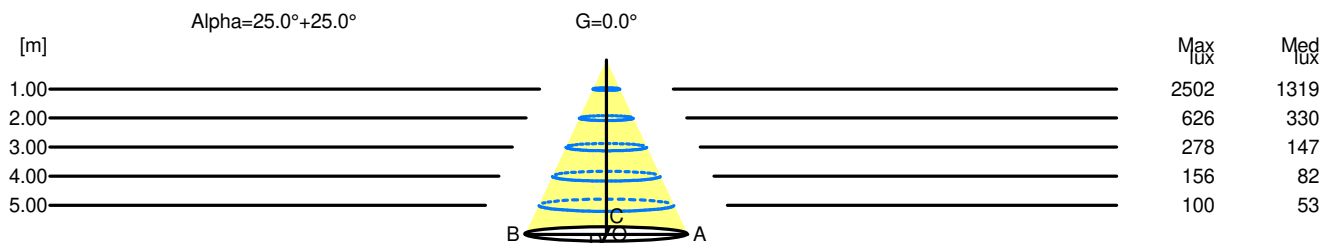

H[m]	D[m]	Max lux	Med lux	Alpha=25.0°+25.0°	G=0.0
1.00	0.93	2502	1319		
2.00	1.86	626	330		
3.00	2.80	278	147		
4.00	3.73	156	82		
5.00	4.66	100	53		