

Luminaire


Code AF05701+AF95104
 Name SHARP RECESSED TRIM 2X 6W 940 WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Measurem.

Code FTS1603144
 Name SHARP RECESSED TRIM 2X 6W 940 WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	397.61 lm	Luminaire Power	5.50 W	Efficacy	72.29 lm/W	Efficiency	100.00%
Lamps Flux	397.61 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.002664 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		Glare area at 76°		Glare area at 76°	
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Measurement Flux	
Date	16-02-2017	Measurement Flux		Measurement Flux		Measurement Flux	
Measurement Distance	0.00	Measurement Flux		Measurement Flux		Measurement Flux	
LED Flux=567.99lm LED Power=5.5W Eff=70% EfcLed=103lm/W EfcLum=72lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100	D DIN 5040		A60		BZ 1	
F UTE	--	B NBN		BZ 1			


74mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

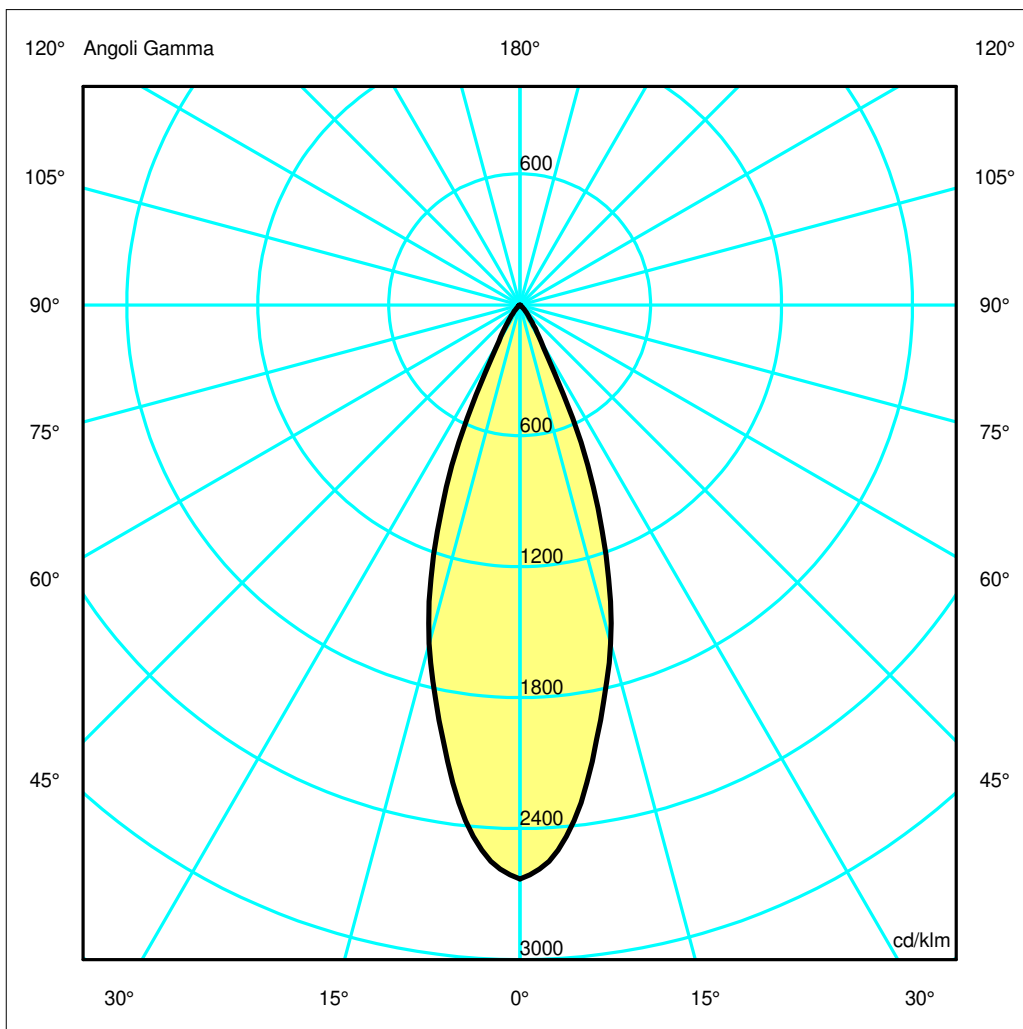

Luminaire

Code AF05701+AF95104
Name SHARP RECESSED TRIM 2X 6W 940 WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Measurerm.


Code FTS1603144
Name SHARP RECESSED TRIM 2X 6W 940 WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	397.61 lm	Luminaire Power	5.50 W	Efficacy	72.29 lm/W	Efficiency	100.00%
Lamps Flux	397.61 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.002664 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000644 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		397.61 lm	
LED Flux=567.99lm LED Power=5.5W Eff=70% EfcLed=103lm/W EfcLum=72lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1046.08	971.75	638.99	227.80	38.73	7.80	0.92	0.13	0.00	0.00
OB	1046.08	971.75	638.99	227.80	38.73	7.80	0.92	0.13	0.00	0.00
OC	1046.08	971.75	638.99	227.80	38.73	7.80	0.92	0.13	0.00	0.00
OD	1046.08	971.75	638.99	227.80	38.73	7.80	0.92	0.13	0.00	0.00

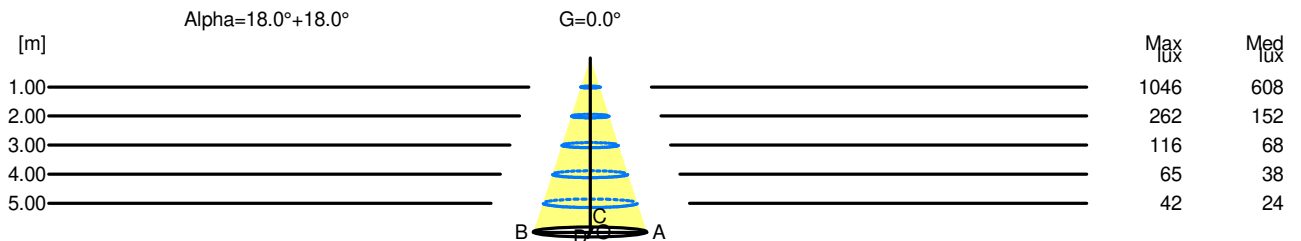

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	1046	608		
2.00	1.30	262	152		
3.00	1.95	116	68		
4.00	2.60	65	38		
5.00	3.25	42	24		