

## Luminaire

Code BB02105+DV1016 + M239200  
 Name LUCERI TRIM max46W 940 MIRROR SILV. + Driver 50W DIM + schermo trasparente

## Measurem.

Code FTS1801210  
 Name LUCERI TRIM max46W 940 MIRROR SILV. + Driver 50W DIM + schermo trasparente

Luminaire Flux	4575.21 lm	Luminaire Power	54.00 W	Efficacy	84.73 lm/W	Efficiency	100.00%
Sources Flux	4575.21 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.007299 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		18-06-2018		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			4575.21 lm

LED Flux=5812lm LED Power=50W Eff=79% EfcLed=116lm/W EfcLum=85lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h

C.I.E. 90 100 100 100 100  
 F UTE 1.00 A

D DIN 5040  
 B NBN

A60  
 BZ 1


Diam=250mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %

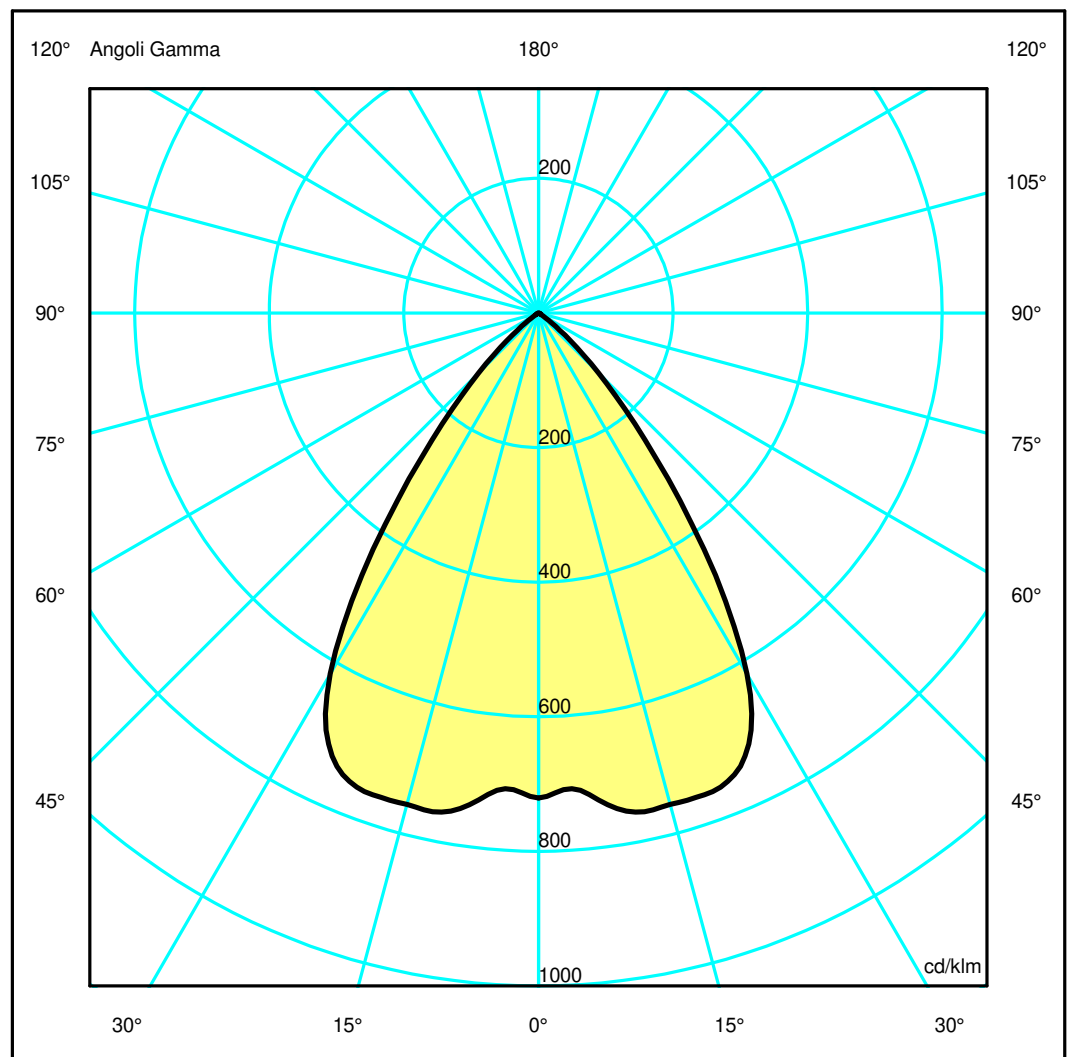

## Luminaire

Code BB02105+DV1016 + M239200  
 Name LUCERI TRIM max46W 940 MIRROR SILV. + Driver 50W DIM + schermo trasparente

## Measurement

Code FTS1801210  
 Name LUCERI TRIM max46W 940 MIRROR SILV. + Driver 50W DIM + schermo trasparente

Luminaire Flux	4575.21 lm	Luminaire Power	54.00 W	Efficacy	84.73 lm/W	Efficiency	100.00%
Sources Flux	4575.21 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4575.21 lm	


LED Flux=5812lm LED Power=50W Eff=79% EfcLed=116lm/W EfcLum=85lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h

C.I.E.	90 100 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.73	1.47	2.20	2.93	3.66	OC	0.73	1.47	2.20	2.93	3.66
OB	0.73	1.47	2.20	2.93	3.66	OD	0.73	1.47	2.20	2.93	3.66

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	3295.85	3257.40	3459.08	3321.90	1960.24	579.17	64.39	10.29	4.95	2.95
OB	3295.85	3257.40	3459.08	3321.90	1960.24	579.17	64.39	10.29	4.95	2.95
OC	3295.85	3257.40	3459.08	3321.90	1960.24	579.17	64.39	10.29	4.95	2.95
OD	3295.85	3257.40	3459.08	3321.90	1960.24	579.17	64.39	10.29	4.95	2.95

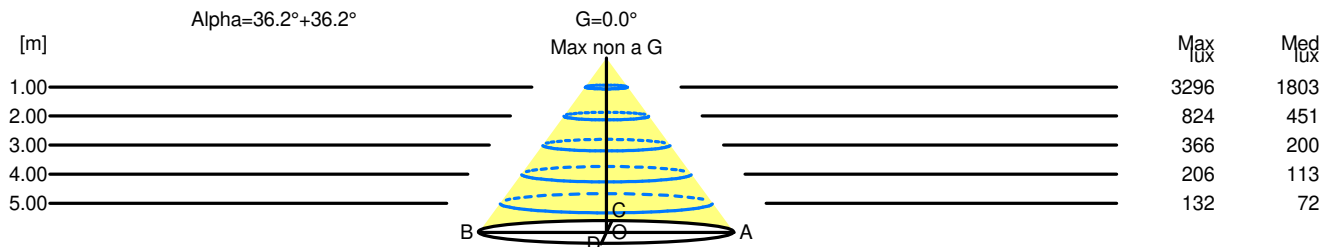

H[m]	D[m]	Max lux	Med lux	Alpha=36.2°+36.2°	G=0.0 Max non a G
1.00	1.47	3296	1803		
2.00	2.93	824	451		
3.00	4.40	366	200		
4.00	5.86	206	113		
5.00	7.33	132	72		