

## Luminaire

Code NL1733325K0  
 Name LineaLed Wallwasher adjustable 100 - FLOOD - 3000K

## Measurement

Code FTS1601664-A  
 Name LineaLed Wallwasher adjustable 100 - FLOOD - 3000K


Luminaire Flux	2857 lm	Luminaire Power	34.0 W	Efficacy	84.029 lm/W	Efficiency	100.00%
Source Flux	2857 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	978 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	958 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.022034 m <sup>2</sup>		Emitting area on Plane 180°	0.000000 m <sup>2</sup>		
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°	0.000000 m <sup>2</sup>		
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°	0.005331 m <sup>2</sup>		
Coordinate system		CG		Symmetry Type	Rotosymmetrical		
Date		23-02-2024		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	2857 lm		

LED Flux=3576lm LED Power=34W Eff=80% EfcLed=105lm/W EfcLum=84lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E. 0 0 0 0 100  
 F UTE 1.00 T

D DIN 5040 --  
 B NBN BZ 10

978mm x 43mm




Semipiani C

180.0 ——— 0.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

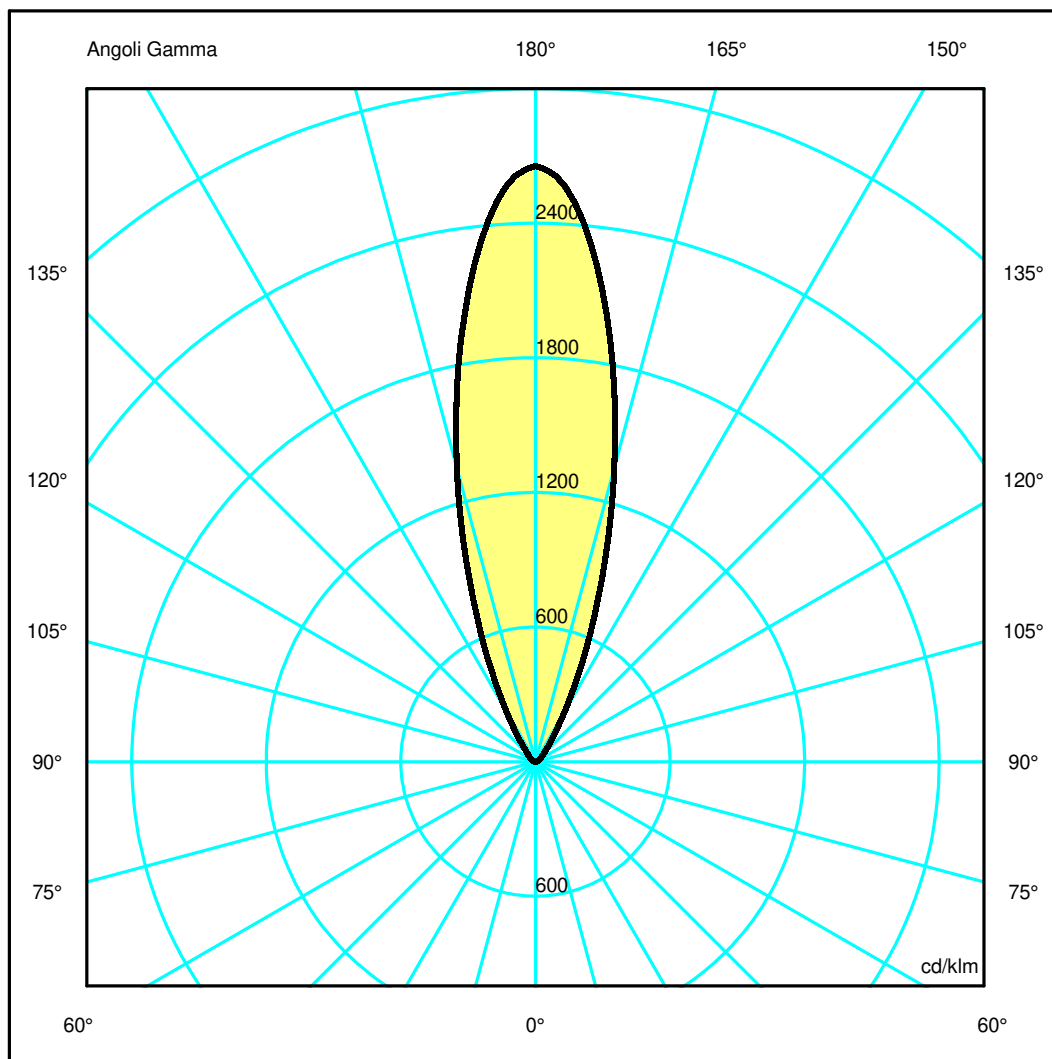

## Luminaire

Code NL1733325K0  
Name LineaLed Wallwasher adjustable 100 - FLOOD - 3000K

## Measurerm.

Code FTS1601664-A  
Name LineaLed Wallwasher adjustable 100 - FLOOD - 3000K

Luminaire Flux	2857 lm	Luminaire Power	34.0 W	Efficacy	84.029 lm/W	Efficiency	100.00%
Source Flux	2857 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	978 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	958 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.022034 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005331 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2857 lm	

LED Flux=3576lm LED Power=34W Eff=80% EfcLed=105lm/W EfcLum=84lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h


C.I.E. 0 0 0 0 100  
F UTE 1.00 T

D DIN 5040 --  
B NBN BZ 10

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.09	1.36	OC	0.27	0.55	0.82	1.09	1.36
OB	0.27	0.55	0.82	1.09	1.36	OD	0.27	0.55	0.82	1.09	1.36

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	7589.75	6913.59	3872.03	1425.38	397.07	145.98	78.43	44.36	20.24	4.45
OB	7589.75	6913.59	3872.03	1425.38	397.07	145.98	78.43	44.36	20.24	4.45
OC	7589.75	6913.59	3872.03	1425.38	397.07	145.98	78.43	44.36	20.24	4.45
OD	7589.75	6913.59	3872.03	1425.38	397.07	145.98	78.43	44.36	20.24	4.45

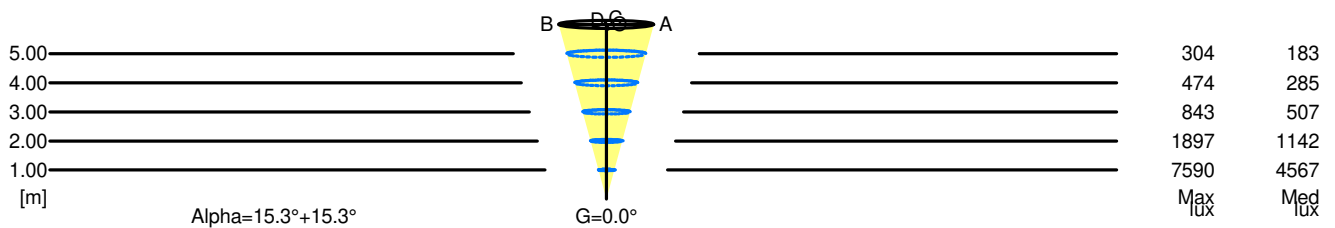

5.00	2.73	304	183		
4.00	2.18	474	285		
3.00	1.64	843	507		
2.00	1.09	1897	1142		
1.00	0.55	7590	4567		
H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3°	G=0.0